

# **WÖHLER**



## **Visual Inspection Systems**

Cameras for the professionals

The Measure of Technology

 Made in Germany



YOUR WÖHLER TEAM IN THE UK



**WOHLER UK LIMITED**  
G1 Lincoln House  
Lincoln Way  
Sherburn in Elmet  
LS25 6PJ

☎ 01977 80 60 40  
✉ info@wohler.co.uk  
🌐 www.wohler.co.uk

**Monday to Friday**  
9 am – 5 pm



**Andrew Moore**  
Managing Director



**Ann Booker**  
Office Manager



**Nathan Henton**  
Regional Sales Manager



Hold the camera of your smartphone over the QR code to be scanned and scan it. Once the code has been read, the relevant product is automatically called up on the Wöhler homepage. Now all you have to do is add it to your shopping basket and order.

Wöhler Visual Inspection Systems

**HD Visual Inspection**

Wöhler VIS 700 HD Visual Inspection System .....	4 – 7
Wöhler L 200 Locator .....	8
Wöhler VIS Camera Trolley .....	9
Accessories HD Inspection Technology .....	10-11

**Visual Inspection**

Wöhler VIS 500 Visual Inspection System .....	12-15
Wöhler VIS 350 PLUS Visual Inspection System .....	16-17
Wöhler VIS 300 / 350 Visual Inspection System.....	18-19
Wöhler VIS 200 / 250 Visual Inspection System .....	20-21
Wöhler L 200 Locator .....	22
Wöhler VIS Camera Trolley .....	23
Accessories Inspection Technology .....	24-27

**Smart Inspection**

Wöhler SI 400 Smart Inspection Camera.....	28-29
--	-------

**Mirrors**

Wöhler Glass Mirror .....	30
Wöhler Chimney Mirror .....	31

**HD Endoscopy**

Wöhler VE 500 HD Video Endoscope .....	32
Wöhler VE 400 HD Video Endoscope .....	33
Wöhler VE 220 HD Video Endoscope.....	34
Overview Probes .....	35





# Wöhler VIS 700 HD Inspection Camera

## Overview of functions

**Video inspection for clear, precise images**

Digital recording and playback of high-resolution video/ photos for crisp, clear images.

**Description of damage & voice comments**

In the photos, a comment function allows you to insert a description of the damage. It is also possible to add voice comments to videos.

**Customised focus setting**

The motorised focus can be adjusted as required using the touch screen or joystick.

**Position, angle and digital metre display**

The camera head's position inside the tube is shown directly. The length of the camera rod as it uncoils is electronically recorded and displayed in the image.

**Flexible operation**

There are two ways to attach the monitor to the case holder - it automatically rotates the image by 180°. It's really easy to operate with just a few buttons. You can swivel and rotate the monitor, and it can be detached from the case up to 2 m.

**Easy cleaning and plenty of space for accessories**

The easy-to-open bottom shell makes the case and removable basket with rod easy to clean. The double-walled hard case also protects the camera head and the monitor.



**Handle**

The individually adjustable handle ensures that you hold the monitor firmly during the inspection.

**Glare protection**

The glare shield can be stored in the case lid and plugged directly onto the monitor when needed.

**Live image transmission via WiFi network**

For transferring the video signal to a mobile device and for easy report generation.

**Powerful Lithium-ion battery and fast charging process**

Efficient with a battery life of around 6 hours - rapid charging through the USB-C port.

**USB stick**

Documentation can be saved either in the internal memory of the camera or on a USB flash drive. This is particularly convenient for providing the customer with immediate access to the documentation while on site.

**Pan & tilt camera head Ø 40 mm**

The colour camera head can be swivelled from left to right by 180° and rotated by 360°. Focus range can be precisely adjusted. Waterproof IP 67. Optional: HD Miniature Camera Head Ø 26 mm water pressure-proof IP 68.

**Stable camera rod**

The camera rod can extend up to 30 m and its construction allows for both flexibility and stability simultaneously.



# Wöhler VIS 700 HD Visual Inspection System

Visual inspection of sewers / air ducts / flue systems / industrial machinery



- Features**
- High Definition picture
  - Focus control via joystick
  - Adjustable sonde frequency
  - Voice recording / photo function
  - Touch screen keyboard for written commentary
  - App-supported operation and report creation

Technical data		
Monitor	TFT display	7" / 16:9 Format
	Resolution	1,280 x 800 px
	Connection cable	2 m
	Power supply	USB-C 5 V / 3 A 3.7 V / 11.4 Ah
	Operating time	4 h
Push rod	Length	20 / 30 m digital metre counting

**Wöhler VIS 700 HD-Cable Camera**  
**Camera head Ø 40 mm, 30 m camera cable**

Scope of delivery: Wöhler VIS 700 monitor with HD TFT monitor 7", Glare protection, Lithium-ion battery, Pan & Tilt colour camera head Ø 40mm, detachable, Camera cable 30 m long with metric marking, 3 replacement plastic domes, USB-charger UK with USB-C-cable, Plastic case, Carrying strap

**Article no. 8761**

**Wöhler VIS 700 HD-Cable Camera**  
**Camera head Ø 40 mm, 20 m camera cable**

Scope of delivery: Wöhler VIS 700 monitor with HD TFT monitor 7", Glare protection, Lithium-ion battery, Pan & Tilt colour camera head Ø 40mm, detachable, Camera cable 20m long with metric marking, 3 replacement plastic domes, USB-charger UK with USB-C-cable, Plastic case, Carrying strap



**Article no. 8745**

**Wöhler VIS 700 HD Inspection Camera**  
**Camera head Ø 40 mm, camera rod 30 m**

Scope of delivery: Wöhler VIS 700 monitor unit with 7" HD TFT widescreen colour monitor incl. 2 m connection cable, Glare shield, Lithium-ion battery, Wöhler HD pan/tilt camera head Ø 40, detachable, Camera rod 8.6 x 5.6 mm - 30 m long (removable for cleaning), 3 spare plastic domes, 1 anti-slip mat, USB mains charger UK with USB-C cable, Double-shell case

**Article no. 8744**






**Wöhler Inspection App**

The monitor image can be sent to mobile devices via WiFi and further processed using the app.



## Modular system

One monitor – many applications

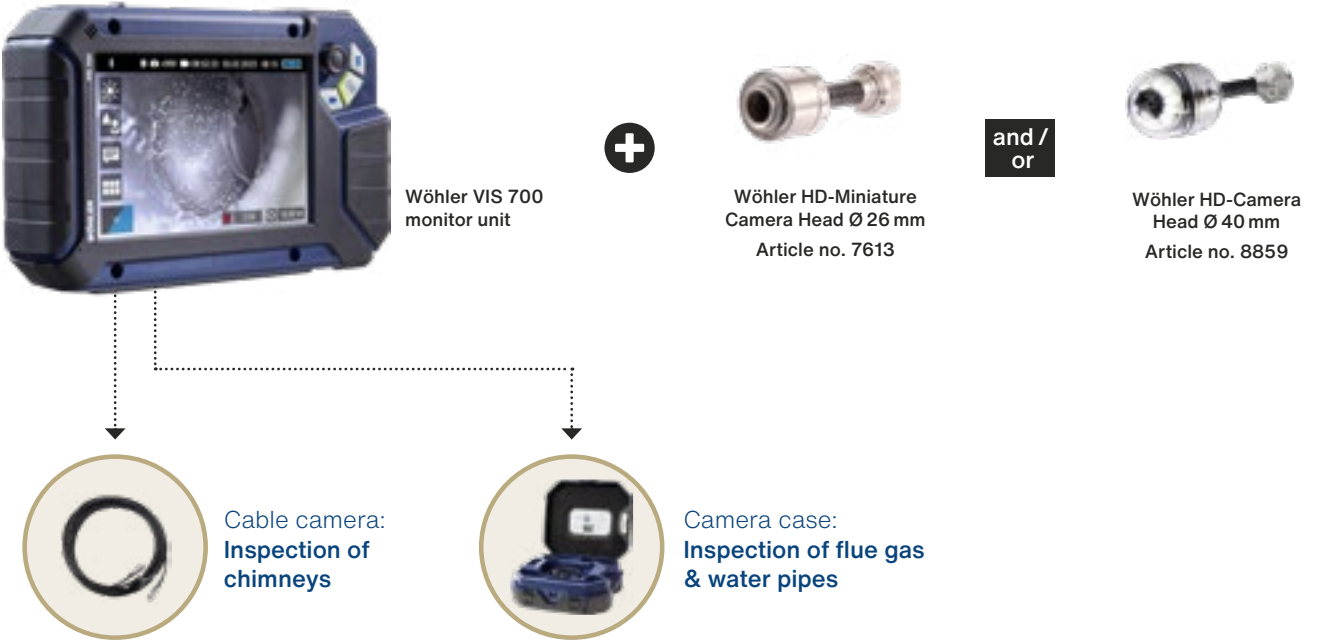

### Wöhler online shop

Discover all the details about the product and much more. Plus, ordering is easy!

[wohler.co.uk/P\\_16510](https://wohler.co.uk/P_16510)



# Wöhler L 200 Locator

Exact localisation of the camera head



- Features**
- Exact localisation of the camera head in pipelines, chimneys, floor or ceiling areas etc.
  - Acoustic signal for orientation via loudspeaker or headphones
  - Crosshairs and signal strength indicate how far away and in which direction the camera head is located
  - Quick detection of damaged areas with the camera heads Ø 26 / 40 mm
  - Locating the radio signals of the camera head enables the damage site to be found quickly
  - Bright, easy to read colour display
  - Easy handling thanks to spatial guidance via the display during the locating
  - Telescopic pole makes it easy to spot damaged areas effortlessly, no matter where you are.
  - Chalk holder enables the direct marking of the damaged areas

Technical data		
Locator Receiver	Display	Graphical display of the camera head position
Output impedance headphones	32 Ohm	
Power supply	Lithium-ion rechargeable battery	
Frequency	9.2 kHz, 8.9 kHz	

Compatible with all current Wöhler VIS camera systems!




**Wöhler L 200 Locator**  
Telescopic pole, Headphones, USB power supply with Micro-USB cable, Chalk (12 pcs. box, yellow), Plastic case  
**Article no. 7430**

## Wöhler online shop

Discover all the details about the product and much more. Plus, ordering is easy!


[wohler.co.uk/7430](http://wohler.co.uk/7430)



# Wöhler VIS Camera Trolley

Optimal guidance of the camera head

- Features**
- Optimal guiding of the camera head:
- In ventilation lines from Ø 150 mm / 150 x 150 mm
  - In drain ducts from Ø 150 mm / 150 x 150 mm
  - In drawn chimneys from Ø 150 mm / 150 x 150 mm
  - Suitable for:
    - All Wöhler VIS camera heads (Ø 26 / 40 mm)
    - Various accessories such as additional lighting, stabilising sleeve and dome protection
  - Plastic wheels ensure optimum guidance in round and flat lines
  - The camera trolley can be easily adjusted to three different heights and moved forwards or backwards in three simple steps thanks to the adjustment rail.
  - Camera head can be mounted on the trolley or suspended underneath it
  - The durable frame is constructed from stainless steel that can withstand corrosion and acid, yet it remains lightweight at just 700 g

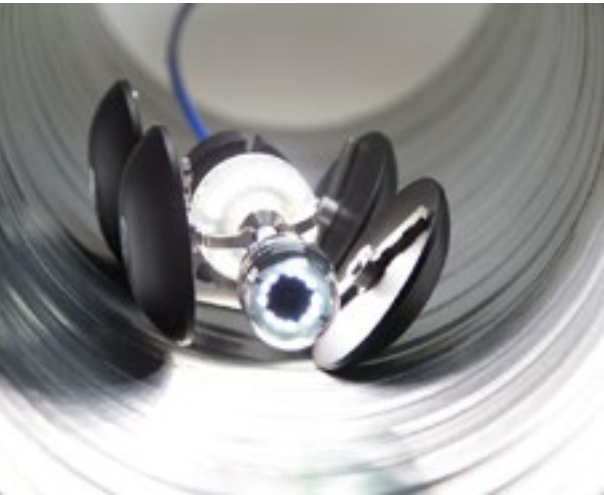

**Wöhler VIS Camera Trolley**  
Camerahead-holder, Storage bag Wöhler VIS Camera Trolley, for inspection of pipes > 150 mm  
**Article no. 4705**

**Wöhler VIS Camera Trolley**  
Camerahead-holder, Storage bag Wöhler, Stabilisation sleeve for light ring 26/40 mm, (can only be used in combination with supplementary light)  
**Article no. 4753**

## Wöhler online shop


















Discover all the details about the product and much more. Plus, ordering is easy!














[wohler.co.uk/4705](http://wohler.co.uk/4705)





Accessories

Accessories for Wöhler VIS 700		Article no.
	Wöhler HD-Miniature Camera Head Ø 26 mm for <b>Wöhler VIS 700</b> Detachable, digital camera head for colour image with leather protective case	7613
	Wöhler HD-Camera Head Ø 40 mm detachable with leather protection bag (for VIS 700)	8859
	Wöhler Light Ring 26/40, detachable for <b>VIS 700 HD Cameras</b> For detachable camera heads only. The additional lighting with 18 white LEDs is installed between the camera head and the camera rod. Power is supplied via the video inspection system.	8818
	Wöhler Guidance Set 70 for <b>camera head Ø 26 mm</b> guidance sleeve with protection cage, centering brush	3883
	Guidance Set 100 for <b>camera head Ø 40 mm</b> protection sleeve with cut-out, roller guide and centering brush	4240
	Camera holder for <b>Wöhler VIS 700</b> for pan and tilt digital camera head Ø 40 mm on sweeping rod with M10 thread for sliding in chimneys and ventilation ducts with GRP camera rod or sweeping rod and camera cable; 180° viewing direction	7068
	Wöhler Camera Spring Guide for <b>Wöhler VIS 500 / 700</b> for Wöhler pan/tilt camera head Ø 40 mm	7081
	Replacement Plastic Domes (10 pcs.) for <b>Wöhler VIS 350 / 500 / 700</b> for Wöhler Camera Head Ø 40mm	3675
	Glass Dome for <b>Wöhler VIS 350 / 500 / 700</b> for Wöhler Camera Head Ø 40 mm	13674
	Protection Sleeve for <b>Wöhler VIS 350 / 500 / 700</b> for Wöhler Camera Head Ø 40 mm Easy installation and secure hold thanks to clamping lever, particularly good visibility thanks to a round recess in the dome area	2641
	Camera Roller Guide for <b>Wöhler VIS 350 / 500 / 700</b> suitable for camera heads and rods	3681
	Guidance Ball for <b>Wöhler VIS 350 / 500 / 700</b> for camera heads and rods Ø 30 x 27 mm for GRP camera rods Ø 6, Ø 6.5 and Ø 7 mm as well as for miniature camera heads improves ability to go through bends for miniature camera head 26 mm	3634
	VIS Centering Brush for <b>Wöhler VIS 350 / 500 / 700</b> for camera heads and rods Ø 20 cm with 6 strip brushes as spacers, can be fixed directly behind the camera head	3850
	VIS Centering Brush for <b>Wöhler VIS 350 / 500 / 700</b> for camera rods Wöhler rod element Ø 20 cm with 6 strip brushes, threaded on one side	3854
	Centering Brush Extension for <b>Wöhler VIS 2xx / 3xx (detachable versions) / VIS 400 / VIS 700</b> Ø 20 cm to extend centering brush art. 3854	3853
	Spare Brushes for <b>centering brush, 24 pieces</b> for replacing the camera guide, rod element and extension element Can be flexibly cut to Ø 70 to Ø 200 mm	3858
	Wöhler Stabilisation Sleeve for <b>VIS 700 push camera</b> for Ø 26 or Ø 40 mm camera heads in combination with light ring. To stabilise the connection between camera push rod and camera head.	6557

Accessories for Wöhler VIS 700		Article no.
	Stabilisation Tube for <b>Wöhler VIS 2xx / 3xx (detachable versions) / VIS 400 / VIS 700</b> to connect centering brush & extension	21736
	Push adapter for stabilisation sleeve for <b>VIS 2xx / VIS 3xx / VIS 400 / VIS 700</b> for pushing all 26 and 40 mm camera heads without using the additional light ring (stabilisation sleeve art. 3591 / art. 22182 needed)	1387
	Wöhler Telescopic Tube 1.6 m for <b>HD Camera head, VIS 700</b> length of the telescopic tube 0.9-1.6 m plus gooseneck 0.3 m	7670
	Wöhler Telescopic Tube 3.4m for <b>HD Camera head, VIS 700</b> length of the telescopic tube 0.9-3.4 m plus gooseneck 0.3 m	7659
	Camera Cable <b>Wöhler VIS 700</b> with metric marking 20 m	6305
	30 m	11012
	Camera cable extension <b>Wöhler VIS 700</b> incl. metric marking 10 m	11425
	20 m	11426
	30 m	11427
	Wöhler VIS Cleaning Set with plastic case 1 liter disinfection spray, 50 cleaning tissues, 100 disposable gloves size XL (powder free), 200 ml lubricant, plastic case For approx. 50 applications	4725
	Wöhler VIS Cleaning Set Refill 1 liter disinfection spray, 50 cleaning tissues, 100 disposable gloves size XL (powder free), 200 ml lubricant, in plastic bag For approx. 50 applications.	4726
	Carrying Strap System for <b>Wöhler VIS 500 / 700</b> with mounting plate for monitor unit	6921
	Magnetic Holder Monitor for <b>Wöhler VIS 500 / 700</b>	2939
	Anti-reflective Film for <b>Wöhler VIS 500 / 700</b> with mounting accessories Display protection function, 150 x 94 mm	7616
	Storage Box with Foam for <b>Wöhler VIS 700</b> for Light Ring and camera head	24657
	Guidance Weight for <b>Wöhler VIS 350 / 500 / 700</b> for camera heads and rods for lowering the camera head – compensates for the bending of the GRP camera rod. Stainless steel guide weight 740 g	3857

Wöhler Video Inspection App  
The monitor image can be sent to mobile devices via WiFi and processed further using the app.



# Wöhler VIS 500 Inspection Camera

## Overview of functions

### High image and video quality

High resolution images allow a view of every detail.

### Flexible operation

There are two ways to attach the monitor to the case holder - it automatically rotates the image by 180°. It's really easy to operate with just a few buttons. You can swivel and rotate the monitor, and it can be detached from the case up to 2 m away.

### Position, angle and digital metre display

The camera head's position inside the tube is shown directly. The length of the camera rod as it uncoils is electronically recorded and displayed in the image.

### Voice comments

Voice commentary can be added via headset during video recording.

### Easy cleaning and plenty of space for accessories

The easy-to-open bottom shell makes the case and removable basket with rod easy to clean. The double-walled hard case also protects the camera head and the monitor.



### Glare protection

The glare shield can be stored in the case lid and plugged directly onto the monitor when needed.

### Live image transmission to the app

For transferring the video signal to a mobile device and for easy report generation.

### Powerful Lithium-ion battery and fast charging process

Efficient with a battery life of around 6 hours – rapid charging through the USB-C port.

### USB stick

Documentation can be saved either in the internal memory of the camera or on a USB flash drive. This is particularly convenient for providing the customer with immediate access to the documentation while on site.

### Pan & tilt camera head Ø 40 mm

The colour camera head can be swivelled from left to right by 180° and rotated by 360°. Waterproof IP 67. Optional: Miniature Camera Head Ø 26 mm water pressure-proof IP 68.

### Stable camera rod

The camera rod can extend up to 30 m and its construction allows for both flexibility and stability simultaneously.



# Wöhler VIS 500 Visual Inspection System

Visual duct, flue gas and ventilation system inspection



**Features**

- Damage analysis, non-destructive inspection and documentation of:
  - 87° bends
  - Sewer pipes from Ø 40 mm
  - House connections up to Ø 200 mm
  - Air pipes and ducts
  - Intermediate ceilings, cavities, shafts
  - Industrial machines / plants
- The universal camera for your applications: Interchangeable camera head, sound and voice recording via headset and different rod lengths.
- Waterproof rotatable and pan and tilt camera head Ø 40 mm for an all-round view
- Easy operating and reporting with the Wöhler video inspection app
- Bright illumination with camera LEDs and optional additional lighting
- Easy to use with an interface consistent across the Wöhler VIS series

**Technical data**

Monitor	TFT display	7" / 16:9 Format
	Resolution	1,024 x 600 px
	Connection cable	2 m
	Power supply	USB-C 5 V / 3 A 3.7 V / 11.4 Ah Lithium-Ionen Akku
	Operating time	6 h
Camera rod	Length	20 / 30 m
		electr. metre counting

**Wöhler VIS 500 Inspection Camera**  
**Camera head Ø 40 mm, camera rod 30 m**

Scope of delivery: Wöhler VIS 500 monitor unit with 7" TFT widescreen colour monitor incl. 2 m connection cable (monitor removable), Glare protection, Lithium-ion battery 6 h operation time, Data storage: Internal memory 4 GB expandable with USB stick, Wöhler pan and tilt camera head Ø 40 (detachable), Camera rod Ø 6.5 mm / 30 m long (removable for cleaning), USB mains charger with USB-C cable, Double sided suitcase, Replacement plastic domes (3 pieces)

Article no. 11508

**Wöhler VIS 500 Inspection Camera INT**  
**Camera head Ø 40 mm, camera rod 20 m**

Scope of delivery: Wöhler VIS 500 monitor unit with 7", Glare shield, Lithium-ion battery, Carrying strap system with mounting plate for monitor unit, Wöhler turn/swivel camera head Ø 40 mm, pluggable, Camera cable with metric - 20 m long, 3 spare plastic domes, USB mains charger with USB-C cable, Plastic case

Article no. 12342

**Wöhler VIS 500 Inspection Camera INT**  
**Camera head Ø 40 mm, camera rod 20 m**

Scope of delivery: Wöhler VIS 500 Monitor incl. power supply with 4 world adaptors, Pan & tilt camera head Ø 40 mm, Camera cable 20 m on cable reel, Transport case XXL, Carrying strap system

Article no. 12141

**Wöhler VIS 500 INT as a Set for rods**  
**Camera head Ø 40 mm, camera rod 20 m**

Scope of delivery: Wöhler VIS 500 Monitor incl. power supply unit with 4 interchangeable adapters, Pan & tilt camera head Ø 40 mm, Camera cable 20 m, Cable reel, Aluminium Case XXL, Wöhler Light Ring 26/40, detachable, Stabilisation sleeve aluminium, Centering Brush Extension Ø 20 cm, Protection Sleeve

Article no. 12176



**Wöhler Inspection App**

The monitor image can be sent to mobile devices via WiFi and further processed using the app.



## Modular system

One monitor – many applications



Wöhler VIS 500 monitor unit



and / or



Camera case:  
**Inspection of flue gas pipes**



Push camera:  
**Inspection of flue gas pipes & chimneys**



Cable camera:  
**Inspection of chimneys**



Cable reel:  
**Inspection of flue gas & water pipes**

**Wöhler online shop**

Discover all the details about the product and much more. Plus, ordering is easy!

[wohler.co.uk/P\\_18810](http://wohler.co.uk/P_18810)





# Wöhler VIS 350 PLUS Visual Inspection System

Inspection of pipes / air ducts / exhaust systems



**Features**

- Analyse damage and inspect of:
  - Waste water lines of Ø 40 mm and larger
  - House connections up to Ø 200 mm
  - Flue gas systems of Ø 40 mm and larger
  - Ventilation ducts
  - False ceilings, hollow spaces, shafts
  - Industrial machines
- Wide range of applications due to interchangeable camera heads (Ø 26 / 40 mm)
- Quick & simple change of heads
- Position of camera head indicated in the display
- Keep your sense of orientation with home function – camera aligns itself automatically
- Picture and video recording
- 2 batteries for up to 4 hours operation
- Built-in location transmitter facilitates wireless location detection

**Technical data**

Monitor	TFT display	7" / 16:9 Format
	Resolution	1,024 x 600 px
	Power supply	Space for 2 rechargeable batteries or via power supply unit
	Operating time	4 h
Push rod	Length	30 m electr. metre counting
	Diameter	Ø 6.5 mm

**Wöhler VIS 350 PLUS Camera**

**Detachable camera head Ø 40 mm, camera rod 30 m**

Scope of delivery: Wöhler VIS 350 Service Camera, digital metre counter, pan and tilt colour camera head Ø 40 mm (detachable), Wöhler TFT monitor 7" with 2 m cable, SD memory card 4 GB for recording of pictures and videos, mini USB cable, 30 m push rod 6.5 mm, 5 replacement plastic domes, 1 anti-slide-mat, 2 NiMH batteries and charger, plastic case

**Article no. 8991**

**Wöhler VIS 350 PLUS Camera**

**Detachable with 2 camera heads Ø 26 mm and Ø 40 mm, camera rod 30 m**

Scope of delivery: Wöhler VIS 350 Service Camera, pan and tilt colour camera head Ø 40 mm (detachable), mini camera head Ø 26 mm (detachable), Wöhler TFT monitor 7" with 2 m cable, SD memory card 4 GB for recording of pictures and videos, mini USB cable, 30 m push rod 6.5 mm, 5 replacement plastic domes, 1 anti-slide-mat, 2 NiMH batteries and charger, plastic case

**Article no. 8955**



**Wöhler online shop**

Discover all the details about the product and much more. Plus, ordering is easy!

[wohler.co.uk/P\\_107](http://wohler.co.uk/P_107)





# Wöhler VIS 300 / 350 Visual Inspection System

Inspection of pipes / air ducts / flue systems



**Features**

- Analyse damage and inspection of:
  - Waste water lines of Ø 70 mm and larger
  - House connections up to Ø 200 mm
  - Flue gas systems of Ø 56 mm and larger
  - Ventilation lines of ventilation systems
  - False ceilings, hollow spaces, shafts
- Keep your sense of orientation with home function – camera aligns itself automatically
- 4 hours flexibility – 2 rechargeable batteries for lasting mobility (optional)
- Built-in location transmitter facilitates wireless location detection
- Distance counter displayed on monitor (only Wöhler VIS 350)
- Fully equipped mobile solution in a robust, plastic case
- Bright TFT colour monitor for razor-sharp images
- Picture and video recording (only Wöhler VIS 350)

**Technical data**

Monitor	TFT-Display	7" / 16:9 Format
	Resolution	1,024 x 600 px
	Power supply	Space for 2 rechargeable batteries or via power supply unit
	Operating time	4 h
Push rod	Length	20 / 30 m electr. metre counting

**Wöhler VIS 350 Service Camera (EN)**  
**Camera rod 20 m, camera head Ø 40 mm**

Scope of delivery: Wöhler VIS 350 Service Camera, digital metre counter, pan and tilt colour camera head Ø 40 mm V2, Wöhler TFT monitor 7" with 2 m cable, SD memory card 4 GB SD for recording of pictures and videos, mini USB cable, 20 m push rod 6.5 mm, 5 replacement plastic domes, 1 anti-slide-mat, 2 NiMH batteries and charger, plastic case

**Article no. 8794**

**Wöhler VIS 350 Visual Inspection Camera**  
**Camera rod 30 m (EN), camera head Ø 40 mm**

Scope of delivery: Wöhler VIS 350 Service Camera, digital metre counter, pan and tilt colour camera head Ø 40 mm V2, Wöhler TFT monitor 7" with 2 m cable, SD memory card 4 GB SD for recording of pictures and videos, mini USB cable, 30 m push rod 6.5 mm, 5 replacement plastic domes, 1 anti-slide-mat, 2 NiMH batteries and charger, plastic case

**Article no. 8792**



**Wöhler online shop**

Discover all the details about the product and much more. Plus, ordering is easy!

[wohler.co.uk/P\\_107](http://wohler.co.uk/P_107)



**Wöhler VIS 300 Visual Inspection Camera**  
**Camera rod 20 m (EN), camera head Ø 40 mm**

Scope of delivery: Wöhler VIS 300 Service Camera, digital distance measurement, pan and tilt colour camera head Ø 40 mm V2, Wöhler TFT-monitor 7" with 2 m cable, 20 m push rod Ø 6.5 mm, 5 replacement plastic domes, 1 anti-slide-mat, 1 NiMH-battery and charger, plastic case

**Article no. 8788**



# Wöhler VIS 200 / 250 Visual Inspection System

Inspection of ducts / air ducts / exhaust systems



**Features**

- Analyse damage and inspect of:
  - Waste water pipes of Ø 40 – 125 mm and larger
  - Ventilation ducts of Ø 40 – 80 mm and larger
  - Inspect hollow spaces, e.g. in front-wall installations
  - Flue gas lines up to approx. Ø 125 mm
- Waterproof, light-sensitive camera head with a diameter of just 26 mm easily takes several bends
- Distance counter displayed on monitor (only Wöhler VIS 250)
- Fully equipped mobile solution in a robust, plastic case
- Bright TFT colour monitor for razor-sharp images
- Tilttable and removable monitor
- Picture and Video recording (only Wöhler VIS 250)

**Technical data**

Monitor	TFT-Display	7" / 16:9 Format
	Resolution	1,024 x 600 px
	Power supply	space for 2 rechargeable batteries or via power supply unit
	Operating time	4 h
Push rod	Length	20 / 30 m
		electr. metre counting

**Wöhler VIS 250 Visual Inspection Camera**  
**Camera rod 20 m, camera head Ø 26 mm (EN)**

Scope of delivery: Wöhler VIS 250 with recording function and digital metre counter, Ø 26 mm mini camera head V2, TFT monitor 7" with 2 m cable, 4 GB SD card for recording of pictures and videos, USB cable, Digital metre counter, 20 m push rod 6 mm, Anti-Slide-Mat, 1 NiMH battery and charger, Complete system in a plastic case

Article no. 8993

**Wöhler VIS 250 Visual Inspection Camera**  
**Camera rod 30 m, camera head Ø 26 mm (EN)**

Scope of delivery: Wöhler VIS 250 Service Camera, digital metre counter, Wöhler camera head Ø 26 mm V2, 4 GB SD memory card for recording of pictures and videos, Wöhler TFT monitor 7" with 2 m cable, mini USB cable, 30 m push rod 6 mm, 1 anti-slide-mat, 1 NiMH battery and charger, plastic case

Article no. 8994



**Wöhler online shop**

Discover all the details about the product and much more. Plus, ordering is easy!

[wohler.co.uk/P\\_86](http://wohler.co.uk/P_86)



**Wöhler VIS 200 Visual Inspection Camera**  
**Camera rod 30 m, camera head Ø 26 mm (EN)**

Scope of delivery: Wöhler VIS 200 Service Camera, Wöhler colour camera head Ø 26 mm V2, Wöhler TFT monitor 7" with 2 m cable, 30 m push rod Ø 6 mm, digital metre counter, 1 anti-slide-mat, 1 NiMH-battery and charger, plastic case

Article no. 5702

# Wöhler L 200 Locator

Exact localisation of the camera head



- Features**
- Exact localisation of the camera head in pipelines, chimneys, floor or ceiling areas etc.
  - Acoustic signal for orientation via loudspeaker or headphones
  - Crosshairs and signal strength indicate how far away and in which direction the camera head is located
  - Quick detection of damaged areas with the camera heads Ø 26 / 40 mm
  - Locating the radio signals of the camera head enables the damage site to be found quickly
  - Bright, easy to read colour display
  - Easy handling thanks to spatial guidance via the display during the locating
  - Telescopic pole makes it easy to spot damaged areas effortlessly, no matter where you are
  - Chalk holder enables the direct marking of the damaged areas

Technical data		
Locator Receiver	Display	Graphical display of the camera head position
Output impedance headphones	32 Ohm	
Power supply	Lithium-ion rechargeable battery	
Frequency	9.2 kHz, 8.9 kHz	

Compatible with all current Wöhler VIS camera systems!




**Wöhler L 200 Locator**  
Telescopic pole, Headphones, USB power supply with Micro-USB cable, Chalk (12 pcs. box, yellow), Plastic case  
**Article no. 7430**

# Wöhler VIS Camera Trolley

Optimal guidance of the camera head

- Features**
- Optimal guiding of the camera head:
- In ventilation lines from Ø 150 mm / 150 x 150 mm
  - In drain ducts from Ø 150 mm / 150 x 150 mm
  - In drawn chimneys from Ø 150 mm / 150 x 150 mm
  - Suitable for:
    - All Wöhler VIS camera heads (Ø 26 / 40 mm)
    - Various accessories such as additional lighting, stabilising sleeve and dome protection
  - Plastic wheels ensure optimum guidance in round and flat lines
  - The camera trolley can be easily adjusted to three different heights and moved forwards or backwards in three simple steps thanks to the adjustment rail.
  - Camera head can be mounted on the trolley or suspended underneath it
  - The durable frame is constructed from stainless steel that can withstand corrosion and acid, yet it remains lightweight at just 700 g

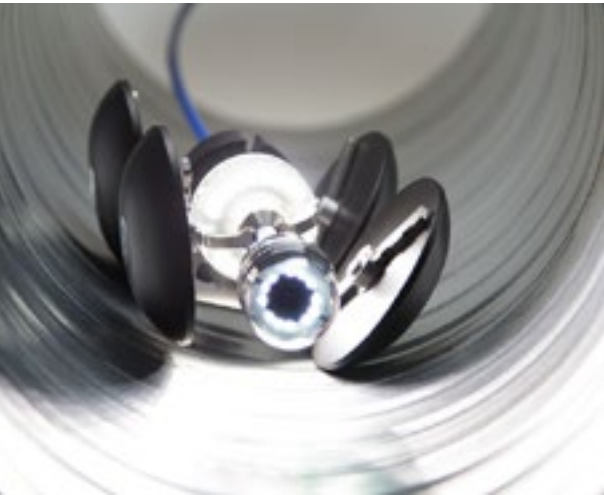

**Wöhler VIS Camera Trolley**  
Camerahead-holder, Storage bag Wöhler VIS Camera Trolley, for inspection of pipes > 150 mm  
**Article no. 4705**

**Wöhler VIS Camera Trolley**  
Camerahead-holder, Storage bag Wöhler, Stabilisation sleeve for light ring 26/40 mm, (can only be used in combination with supplementary light)  
**Article no. 4753**



**Wöhler online shop**

Discover all the details about the product and much more. Plus, ordering is easy!

[wohler.co.uk/7430](https://wohler.co.uk/7430)





**Wöhler online shop**












Discover all the details about the product and much more. Plus, ordering is easy!












[wohler.co.uk/4705](https://wohler.co.uk/4705)


























Accessories

Accessories		Article no.
	<b>Wöhler Miniature Camera Head Ø 26 mm</b> <b>for Wöhler VIS 350 / 500</b> Colour, detachable, with pouch Camera head with flexible connection (PAL) for GRP camera rod and leather protective bag	420
	<b>Wöhler Camera Head Ø 40 mm</b> <b>for Wöhler VIS 350 / 500</b> detachable, pan and tilt flexible connection to camera rod, with leather protection bag	870
	<b>Wöhler Light Ring 26/40, detachable</b> <b>for Wöhler VIS 350 / 500</b> for camera heads Ø 26 mm / Ø 40 mm Only for detachable camera heads – the additional lighting with 18 white LEDs is mounted between the camera head and the camera pole. Power is supplied via the video inspection system. Ø-Outside 53 mm	11398
	<b>Wöhler Car charger 18 V</b> <b>for Wöhler VIS 2xx / VIS 3xx / VIS 400</b>	3169
	<b>Power Supply</b> <b>for VIS 2xx/VIS 3xx</b> approx. charge time 3 hours <i>with adaptors for all countries</i>	4798
	<b>Battery 12 V NiMh 2600 mAh</b> <b>for Wöhler VIS 2xx / VIS 3xx</b> operation time: 120 min	4715
	<b>Wöhler VIS Cleaning Set</b> with plastic case 1 liter disinfection spray, 50 cleaning tissues, 100 disposable gloves size XL (powder free), 200 ml lubricant, plastic case For approx. 50 applications	4725
	<b>Wöhler VIS Cleaning Set Refill</b> 1 liter disinfection spray, 50 cleaning tissues, 100 disposable gloves size XL (powder free), 200 ml lubricant, in plastic bag For approx. 50 applications.	4726
	<b>Aluminium Case XXL</b> <b>for Wöhler VIS 350 / 500</b> 48 x 27 x 48 cm	5824
	<b>Guidance Weight</b> <b>for Wöhler VIS 350 / 500 / 700</b> for camera heads and rods for lowering the camera head – compensates for the bending of the GRP camera rod. Stainless steel guide weight 740 g	3857
	<b>Wöhler Camera Spring Guide</b> <b>for Wöhler VIS 500 / 700</b> for Wöhler pan/tilt camera head Ø 40 mm	7081

Accessories		Article no.
	<b>Guidance Sleeve</b> for camera head Ø 26 mm increases arc mobility and protects the camera head	3827
	<b>Guidance Sleeve with protection cage</b> for camera head Ø 26 mm increases arc mobility, protects the camera head and also the lens	3847
	<b>Protection Sleeve</b> <b>for Wöhler VIS 350 / 500 / 700</b> for Wöhler Camera Head Ø 40 mm Easy installation and secure hold thanks to clamping lever, particularly good visibility thanks to a round recess in the dome area	2641
	<b>Replacement Plastic Domes (10 pcs.)</b> <b>for Wöhler VIS 350 / 500 / 700</b> for Wöhler Camera Head Ø 40mm	3675
	<b>Glass Dome</b> <b>for Wöhler VIS 350 / 500 / 700</b> for Wöhler Camera Head Ø 40 mm	13674
	<b>Wöhler Guidance Set 70</b> for camera head Ø 26 mm guidance sleeve with protection cage, centering brush	3883
	<b>Guidance Set 100</b> for camera head Ø 40 mm protection sleeve with cut-out, roller guide and centering brush	4240
	<b>VIS Centering Brush</b> <b>for Wöhler VIS 350 / 500 / 700</b> for camera heads and rods Ø 20 cm with 6 strip brushes as spacers, can be fixed directly behind the camera head	3850
	<b>VIS Centering Brush</b> <b>for Wöhler VIS 350 / 500 / 700</b> for camera rods Wöhler rod element Ø 20 cm with 6 strip brushes, threaded on one side	3854
	<b>Centering Brush Extension</b> <b>for Wöhler VIS 2xx / 3xx (detachable versions) / VIS 400 / VIS 700</b> Ø 20 cm to extend centering brush art. 3854	3853
	<b>Relining Adapter</b> <b>for VIS 350 PLUS / VIS 500</b> only for detachable versions	6888

Accessories

Accessories		Article no.
	<b>Camera holder</b> for Wöhler VIS 500 for reverse view - for Ø 40mm camera head for pan and tilt camera head Ø 51 mm and Ø 40 mm for sliding in chimneys and ventilation ducts with GRP camera rod or sweeping rod and camera cable; 180° viewing direction	3720
	<b>Camera Roller Guide</b> for Wöhler VIS 350 / 500 / 700 suitable for camera heads and rods	3681
	<b>Stabilisation Tube</b> for Wöhler VIS 2xx / 3xx (detachable versions) / VIS400 / VIS 700 to connect centering brush & extension	21736
	<b>Wöhler Stabilisation sleeve aluminium</b> for Ø 50 mm pan and tilt camera heads for use with camera cable: head can be pushed upwards with GRP Rods	22182
	<b>Spare Brushes</b> for centering brush, 24 pieces for replacing the camera guide, rod element and extension element Can be flexibly cut to 70 to Ø 200 mm	3858
	<b>Guidance Ball</b> for Wöhler VIS 350 / 500 / 700 for camera heads and rods Ø 30 x 27 mm for GRP camera rods Ø 6, Ø 6.5 and Ø 7 mm as well as for miniature camera heads improves ability to go through bends for miniature camera head 26mm	3634
	<b>Guidance Weight</b> for Wöhler VIS 350 / 500 / 700 for camera heads and rods for lowering the camera head - compensates for the bending of the GRP camera rod Stainless steel guide weight 740 g	3857
	<b>Wöhler Glare Protection</b> for Wöhler VIS 2xx / 3xx	6814
	<b>Anti Slide Mat</b> for Wöhler VIS 350 / 500 / 700 30 x 12 cm washable up to 60 °C	3252
	<b>Wöhler Telescopic Tube 1.6m</b> for all camera heads with flexible gooseneck for all camera heads, length of the telescopic tube 0.9-1.6 m plus gooseneck 0.3 m	7005
	<b>Wöhler Telescopic Tube 3.4m</b> for all camera heads with flexible gooseneck for all camera heads, length of the telescopic tube 0.9-3.4 m plus gooseneck 0.3 m	7024
	<b>Carrying Strap System</b> for Wöhler VIS 500 / 700 with mounting plate for monitor unit	6921
	<b>Magnetic Holder</b> for Wöhler VIS 500 / 700	2939
	<b>Anti-reflective Film</b> for Wöhler VIS 500 / 700 with mounting accessories Display protection function 150 x 94 mm	7616

Accessories		Article no.
	<b>Wöhler Camera Viper</b> for Wöhler VIS 400 / 500 with digital metre counter, belt holder and stand	7302
	push rod 20 m / Ø 6.5 mm / blue	
	push rod 30 m / Ø 6.5 mm / blue	7301
	push rod 30 m / Ø 7 mm / red	7309
	push rod 20 m / Ø 7 mm / red	7307
	push rod 20 m / Ø 6 mm / black	7308
	push rod 30 m / Ø 6 mm / black	7336
	<b>Cable reel</b> for Wöhler VIS 500 with digital metre counter	15121
	with 20 m camera cable	
	with 30 m camera cable	15122
	<b>Wöhler Camera Cable</b> for Wöhler VIS 400 / 500   with metric marking	9172
	20 m	
	30 m	7812
	50m	7845
	<b>Wöhler Camera Extension Cable</b> for Wöhler VIS 400 / 350 / 500 with metric marking The camera cable can be extended to a maximum length of 50 m without interference.	8636
	10 m	
	30 m	8048
	<b>Wöhler Lowering Aid</b> for Wöhler VIS 500 / 700 made of stainless steel / extendable from 16 - 40 cm the roller remains centred even when the lowering aid is extended particularly advantageous when working with camera head and camera cable	5706



# Wöhler SI 400 Smart Inspection Camera

Quick inspection with HD quality of flue gas pipes, air ducts and chimneys








Features

- Everything is visible with the sharp HD picture and bright lighting
- Small, handy camera for quick use
- Intuitive operation via the free Wöhler Smart Inspection App
- Signal range up to 12-15 metres when not obstructed: Video recording is guaranteed even if the WiFi connection is interrupted

Technical data

Camera head dimensions	Ø 40 mm
Connection	M5 thread compatible with all Wöhler Vipers with M5 or M10 thread (with adaptor) also compatible with Industry Sweeping Rods
Image transmission	Via the device's internal WiFi in the Wöhler Smart Inspection App
Image quality:	HD

Accessories	Article no.
 <b>Thread Adapter M5 to M10</b> For use with the Wöhler SI 400 Smart Inspection Camera with GRP rods with M10 internal thread	10276
 <b>Protection Sleeve</b> Easy installation and secure hold thanks to clamping lever, particularly good visibility thanks to a round recess in the dome area	2641
 <b>VIS Centering Brush</b> Centres the GRP camera rod and is used to guide the camera head in conjunction with the camera roller guide and/or with the extension element or extension piece Wöhler rod element Ø 20 cm with 6 strip brushes, threaded on one side	3854
 <b>Magnetic Holder</b> for securely attaching the HD video endoscope to magnetic surfaces. Included magnets can be used for Wöhler VE 500 HD-video-endoscope.	6986
 <b>Guidance Ball</b> Ø 30 x 27 mm for GRP camera rods Ø 6, Ø 6.5 and Ø 7 mm as well as for miniature camera heads improves ability to go through bends for miniature camera head 26 mm	3634



Wöhler online shop

Discover all the details about the product and much more. Plus, ordering is easy!

[wohler.co.uk/shop/P\\_200](https://wohler.co.uk/shop/P_200)



Wöhler SI 400 Smart Inspection Camera  
Basic Set

Scope of delivery: Wöhler SI 400 Smart Inspection Camera with Li-Ion battery, Bag, Guidance Ball, Protection Sleeve, 32 GB Memory Card

Article no. 12400

Wöhler SI 400 Smart Inspection Camera  
Professional Set

Scope of delivery: Wöhler SI 400 Smart Inspection Camera, Bag, Guidance Ball, Protection Sleeve, 32 GB Memory Card, VIS Centering Brush, Thread Adapter

Article no. 12401

# Wöhler Glass Mirror

Exhaust gas system check



**Features**

- Inspection of:
  - Objects hard to reach
  - Chimneys
  - Buildings
- Glass mirrors with high optical quality
- Mirrors can be rotated and tilted
- Protected by aluminium frame
- Practical telescopic handle – easy to pull out from 20 to 99 cm

**Wöhler Glass Hand Mirror  
5 x 8 cm**

with leather cover

**Article no. 5064**

**Wöhler Glass Mirror Small  
with telescopic handle**

Scope of delivery: Glass mirror 2.6 x 7 cm, Imitation leather cover, Telescopic handle extendable up to 99 cm, Ball joint (can be swivelled and tilted)

**Article no. 8064**

**Wöhler Glass Mirror Medium  
with telescopic handle**

Scope of delivery: Glass mirror 5 x 8 cm, Imitation leather cover, Telescopic handle extendable up to 99 cm, Ball joint (can be swivelled and tilted)

**Article no. 8059**

**Wöhler Glass Mirror Large  
with telescopic handle**

Scope of delivery: Glass mirror 8 x 15 cm, Imitation leather cover, Telescopic handle extendable up to 99 cm, Ball joint (can be swivelled and tilted)

**Article no. 8087**

**Wöhler online shop**

Discover all the details about the product and much more. Plus, ordering is easy!

[wohler.co.uk/P\\_22](https://wohler.co.uk/P_22)



# Wöhler Chimney Mirror

Exhaust gas system check



**Features**

- Inspection of:
  - Objects hard to reach
  - Chimneys
- Robust metal mirror
- Polished and high-gloss chrome-plated, good optical quality
- Tilttable mirror on handle
- Screwable telescopic handle extendable from 30 to 54 cm

**Wöhler Chimney Mirror Small**

Wöhler chimney mirror, metal mirror plate 7 x 10 cm with leather sleeve

**Article no. 1015**

**Wöhler Metal Chimney Mirror Small  
with telescopic handle**

High-gloss chrome-plated metal mirror, 6.8 x 10 cm, telescopic handle 54 cm long, with imitation leather cover

**Article no. 1748**

**Wöhler online shop**

Discover all the details about the product and much more. Plus, ordering is easy!

[wohler.co.uk/P\\_11](https://wohler.co.uk/P_11)





# Wöhler VE 500 HD Video Endoscope

Inspection of inaccessible spaces / with integrated monitor



Features

- HD inspection of:
  - Inaccessible spaces through the smallest openings from Ø 4 mm
  - Pre-wall installations, spouts, drainage pipes, fireplaces, combustion chambers, connecting pieces
  - Inspection openings and fire damper
- Large colour monitor
- Image rotation
- Split screen mode
- Stand for positioning the monitor
- Can be used on several devices simultaneously
- Additional LED lamp on the endoscope to illuminate the inspection area



Technical data		
Monitor	Size	7"
	Resolution	1,280 x 720 px
	Interfaces	Micro-USB data / charging port Micro SD card slot
Video endoscope HD Probe camera head	Protection class	IP 67
Recording formats	Image file	JPG
	Video file	AVI
Power supply	Lithium-ion rechargeable battery	
Operating time	5 – 6 h	

**Wöhler VE 500 HD-Video-Endoscope**  
**incl. probe Ø 5.5 mm / 1 m / 90°**  
Scope of delivery: Wöhler VE 500 HD Video Endoscope with WiFi function and USB C, HD Video Endoscope combination probe Ø 5.5 mm / 1 m / 90°, Lithium-ion battery, Micro SD card 32 GB, USB charger, Connection cable 1.5 m, Carrying case  
**Article no. 11390**

# Wöhler VE 400 HD Video Endoscope

HD inspection of inaccessible spaces

Features

- HD inspection of:
  - Inaccessible spaces through the smallest openings from Ø 4 mm (e.g. tile spacers)
  - Pre-wall installations, sinks, drain ducts
  - Fireplaces, combustion chambers, connectors
  - Inspection openings and fire dampers
- Large 5" HD colour monitor
- HD Video Endoscope waterproof probes
- Image rotation
- Image and video recording on Micro-SD Card
- Additional lamp on the unit with 4 LEDs to illuminate the inspection area
- Ø 3.9 mm probe for smallest inspection openings
- Switchable 0°/ 90° straight line / side view probe Ø 5.5 mm

Technical data		
Monitor	Display	5"
	Resolution	1,280 x 720 px
	Interfaces	Micro-USB-Data / charging connection Micro-SD Card slot
HD Probe camera head	Protection class	Waterproof IP 67
File formats	Image format	JPG
	Video format	MP4
Power supply	Lithium-ion rechargeable battery	
Operating time	4 h	

**Wöhler VE 400 HD Video Endoscope**  
**HD Probe 1 m, Ø 5.5 mm, view 0° / 90°**  
Scope of delivery: Wöhler VE 400 HD Video Endoscope, HD-Video-Endoscope-probe 0° / 90° / Ø 5.5 mm / 1 m, Lithium-ion battery, Micro SD card 16 GB, Micro USB charger, Extension cable 1.5 m, Case  
**Article no. 6920**



## Wöhler online shop

Discover all the details about the product and much more. Plus, ordering is easy!

[wohler.co.uk/P\\_199](http://wohler.co.uk/P_199)



## Wöhler online shop

Discover all the details about the product and much more. Plus, ordering is easy!

[wohler.co.uk/P\\_169](http://wohler.co.uk/P_169)



# Wöhler VE 220 HD Video Endoscope

HD Inspection of inaccessible cavities



Features














- HD inspection of:
  - Inaccessible cavities through smallest openings from Ø 6 mm (e.g. tile cross)
  - Pre-wall installations, sinks, drain ducts
  - Fireplaces, combustion chambers, connectors
  - Inspection openings and fire dampers
- Transmission of image and video data via WiFi to smartphone, laptop, tablet, PC
- Can be used simultaneously on several devices
- Direct forwarding of pictures and videos via "Share function" of the smartphone/tablet
- Image and video recording
- Switchable hand lamp
- Compatible with Android/iOS
- Probe length up to 10 m

Technical data

Signal transmission	Wireless LAN Network Standard	IEEE 802.11 b/g/n
	Data transmission rate wireless card with 802.11 a/b/g/n	up to 150 Mbit/s
HD Probe camerahead	Protection	waterproof IP 67
File formats	Image format	JPG
	Video format	AVI
Power supply	2.600 mAh Lithium-ion rechargeable battery	

Wöhler VE 220 HD Video Endoscope  
HD Probe 1 m, Ø 7.6 mm

Scope of supply: Wöhler VE 220 HD Video Endoscope with 1.0 m probe Ø 7.6 mm, side tip mirror, magnet, hook tool, plastic case  
*(The VE 220 is not compatible with a Windows Phone)*  
Article no. 12132

Probes for all endoscopes		Article no.
	<b>HD-Video-Endoscope-Probe   Wöhler VE-Series</b> Ø 3.9 mm / 1 m	6929
	<b>Video Endoscope Probe   Wöhler VE-Series</b> Ø 5.5 mm / 1.2 m <i>Not compatible with Wöhler VE 300 Endoscope</i>	7787
	<b>HD-Video-Endoscope-Probe   Wöhler VE-Series</b> Ø 25 mm / 3 m For use in waste water / flue gas pipes from Ø 40 mm. <i>Not compatible with Wöhler VE 300 video endoscopes.</i>	6911
	<b>HD-Video-Endoscope-Probe 0° / 90°   Wöhler VE-Series</b> Ø 5.5 mm / 1 m / 90°	11415
	<b>HD-Video-Endoscope-Probe (2 Cameras)   Wöhler VE-Series</b> Ø 8.5 mm / 3 m / 90° for Wöhler VE 500 For use in waste water / flue gas pipes from Ø 40 mm	11416
	<b>HD-Video-Endoscope-Probe (3 Cameras)   Wöhler VE-Series</b> Ø 7.9 mm / 10 m / 180° for Wöhler VE 500 Incl. large protective bag video endoscope	11417
	<b>HD-Video-Endoscope-Probe (3 Cameras)   Wöhler VE-Series</b> Ø 25 mm / 5 m / 180° with roller guide Camera 1: FoV 78° and 15 mm - 30 mm Camera 2: FoV 78° and 30 mm - 100 mm	11419
	<b>HD-Video-Endoscope-Probe (3 Cameras)   Wöhler VE-Series</b> Ø 25 mm / 10 m / 180° for Wöhler VE 500 with roller guide Incl. large protective bag video endoscope.	11418
	<b>HD-Video-Endoscope-Probe, swivelling   Wöhler VE-Series</b> Ø 6.2 mm / 1.5 m / 180° incl. bag and 1 m connection cable. With 8 LEDs, focus distance 20 - 100mm, FoV 100°. Compatible with current Wöhler VE series.	11321
	<b>Video-Endoscope-Connection-Cable   Wöhler VE-Series</b> 1.5 m For extending the connection between the Wöhler VE video endoscope and the video endoscope probes.	6931
	<b>Magnetic Holder   Wöhler VE-Series</b> for Wöhler VE-Series for securely attaching the HD video endoscope to magnetic surfaces	6986
	<b>Large Protective Bag Video-Endoscopes   Wöhler VE-Series</b> for Wöhler VE-series and probes	10185
	<b>Protection Bag   Wöhler VE-Series</b> for Wöhler VE-Series	6914

Wöhler online shop

Discover all the details about the product and much more. Plus, ordering is easy!

wohler.co.uk/P\_136





# Knowledge platform

Qualified · Practice-Oriented · Technological

You have to work with the most diverse standards, rules and regulations daily – who is supposed to remember all this? On our knowledge platform you will find compact application knowledge for the professionals about:

- ▶ Measuring
- ▶ Inspection
- ▶ Cleaning



## Inspection Knowledge platform

Camera Inspection of connection pipes around the home

Home plumbing pipes are hidden underground or run through the foundation of the house to carry wastewater to the sewer system. The sewer line connects the municipal sewer system to the property line or the first clean-out on the property. Property owners are typically responsible for installing, maintaining, and repairing these drainage lines within their own property boundaries.



Scan  
now!



wohler.co.uk/  
knowledge



Scan  
now!



wohler.co.uk/  
s/c1183







## INTERNATIONAL OPERATING, INDEPENDENT, GERMAN FAMILY-OWNED COMPANY

For over 90 years, we have been a technically orientated, internationally operating family business with more than 250 employees worldwide. We are a leading manufacturer of measurement technology, inspection technology and cleaning technology with headquarters in Bad Wünnenberg, Germany.

Scan the QR code and find out more about our corporate culture, how we are committed to sustainability and how we act as an employer.



# WÖHLER

**WOHLER UK LIMITED**

G1 Lincoln House · Lincoln Way · Sherburn in Elmet · LS25 6PJ

**Phone:** 01977 80 60 40 · **E-Mail:** [info@wohler.co.uk](mailto:info@wohler.co.uk)