

2026

WÖHLER



**EQUIPMENT FOR
CHIMNEY SWEEP EXPERTS**
CLEAN | INSPECT | MEASURE

Made in Germany

YOUR WÖHLER TEAM IN THE UK



WOHLER UK LIMITED
G1 Lincoln House
Lincoln Way
Sherburn in Elmet
LS25 6PJ

☎ 01977 80 60 40
✉ info@wohler.co.uk
🌐 www.wohler.co.uk

Monday to Friday
9 am – 5 pm



Andrew Moore
Managing Director



Ann Booker
Office Manager



Nathan Henton
Regional Sales Manager
Central & South West



Hold the camera of your smartphone over the QR code to be scanned and scan it. Once the code has been read, the relevant product is automatically called up on the Wöhler homepage. Now all you have to do is add it to your shopping basket and order.

Index

Chimney Cleaning

Wöhler Viper S.....4

Wöhler Viper M / Viper M PLUS..... 6-7

Wöhler H 420 Viper8

Wöhler Viper L9

Wöhler Viper XL / XXL 10

Stars11-12

Threaded Brushes..... 13-14

Star Holders & Cleaning Accessories.....14-15

Cleaning Technology

Wöhler Snap & Sweep® System..... 16-17

Wöhler Snap & Sweep® Accessories18-19

Wöhler Rotary Viper Heavy-Duty..... 20

Wöhler Rotary Viper Chimney 22

Wöhler Rotary Viper M10 23

Wöhler Rotary Viper M5..... 25

Visual Inspection

Wöhler SI 400 Smart Inspection Camera..... 26

Wöhler VIS 360 Inspection Camera 28

Wöhler VIS 500 Inspection Camera30-31

Accessories for Wöhler VIS Systems..... 32-33

Wöhler Glass Mirror / Wöhler Chimney Mirror34-35

Measuring

Wöhler DP 600 Leakage Tester 36

Wöhler DM 602 Digital Manometer..... 40

Wöhler CM 220 Carbon Monoxide Meter41

Wöhler RP 72 Soot Test Pump..... 42



Wöhler Viper S

Cleaning of openings from Ø 40 mm



- Features**
- Cleaning of:
 - Exhaust pipes Ø 40 – 150 mm
 - Connectors
 - Small air ducts
 - GRP rod with abrasion-resistant PA sheath
 - Provides splash protection when inserting the wet GRP rod
 - Ergonomically shaped handle
 - 2 coupling holders – for right and left-handers
 - Fits in the Wöhler tool carrier and backpack measuring case
 - For holding HT mini hole stars and HT pipe brushes

Technical data	
Basket diameter	28 cm
Width	3.3 cm
Weight	0.84 kg including 15 m GRP rod

Accessories		Article no.
	Mini Hole Star, HT 6 mm / 0.24" inner hole diameter temperature resistant up to 250 °C Ø 7 cm / 2.8"	15907
	Ø 10 cm / 4"	15910
	Ø 13 cm / 5.1"	15913
	Ø 15 cm / 6"	15915
	Ø 20 cm / 8"	15920
	Threaded Brush, HT with guide ball and M5 thread temperature resistant up to 250°C Ø 7 cm / 2.8"	14607
	Ø 10 cm / 4"	14610
	Ø 13 cm / 5.1"	14613
	Ø 15 cm / 6"	14615
	Ø 20 cm / 8"	14620
	Deflection spiral M10 made of stainless steel with internal and external thread, ideal for tight bends, for GRP rod Ø 6 mm and sweeping witch, also for push head adapter and mini push head	8638
	Deflector M 5 ideal for tight bends for mounting the mini hole stars or tube brushes M5	3838
	Guidance End Ball with M5 threaded pin for the GRP rod Ø 4.5 mm for fastening the PEK mini hole stars	8063
	Mini Push Head Aluminium Ideal for tight bends for mounting mini hole stars on the GRP rod Ø 6 mm or on the sweeping witch	7900

Wöhler online shop

Discover all the details about the product and much more. Plus, ordering is easy!

wohler.co.uk/P_16



Wöhler Viper S 15 m

Scope of delivery: GRP Rod 4.5 mm, 15 m stainless steel end piece M5, guidance adapter

Article no. 2028

Brushes/ stars must be purchased separately.

Wöhler Viper M

Cleaning of openings up to Ø 250 mm



- Features**
- Cleaning of:
 - Exhaust systems up to approx. Ø 250 mm
 - Connecting pieces up to approx. Ø 250 mm
 - Air ducts
 - GRP rod with abrasion-resistant PA sheath
 - Precisely adjustable freewheel brake
 - Transport option for two additional line stars
 - Coupling holder for sweeping and transporting
 - For carrying line stars and threaded brushes

Technical data	
Basket diameter	42 cm
Weight	Approximately 2 kg including 15/20 m GRP rod
Freewheel brake	Precisely adjustable
GRP rod	Ø 7 mm
Stainless steel end piece	M10

Wöhler Viper M
15 m
Scope of delivery: Wöhler Handy Viper M - 15m GRP Rod 7 mm Ø (without stars)
Article no. 7649

Wöhler Viper M
20 m
Scope of delivery: Wöhler Handy Viper M - 20m, GRP Rod 7 mm Ø (without stars)
Article no. 7648

Brushes/ stars must be purchased separately.

Wöhler Viper M PLUS

With digital metre counting – internal M10 thread

- Features**
- Cleaning of:
 - Exhaust systems up to approx. Ø 250 mm
 - Connecting pieces up to approx. Ø 250 mm
 - Air ducts
 - Digital metre counting
 - Quick-change push head for convenient changing of line stars
 - GRP rod with abrasion-resistant PA sheath and protective hose
 - Precisely adjustable freewheel brake and transport lock
 - Transport option with star holder with protective plate for two additional line stars
 - Coupling holder for sweeping and transporting
 - For holding line stars and threaded brushes

Technical data	
Basket diameter	42 cm
Weight	Approximately 2 kg incl. 15 / 20 m GRP rod
Freewheel brake	Precisely adjustable
GRP rod	Ø 7 mm
Stainless steel end piece	M10

Wöhler Viper M PLUS
15 m - with digital metre counter
Scope of delivery: GRP Rod 7 mm Ø, 15 m with stainless steel end pieces M10, quick change star holder to hold stars and GRP push head for mounting stars (without stars)
Article no. 3770

Wöhler Viper M PLUS
20 m - with digital metre counter
Scope of delivery: GRP Rod 7 mm Ø, 20 m with stainless steel end pieces M10, quick change star holder to hold stars and GRP push head for mounting stars (without stars)
Article no. 3790

Brushes/ stars must be purchased separately.



Wöhler online shop
Discover all the details about the product and much more. Plus, ordering is easy!
wohler.co.uk/P_17



Wöhler online shop
Discover all the details about the product and much more. Plus, ordering is easy!
wohler.co.uk/shop/P_17



Wöhler H 420 Viper

20m - with digital metre counter



Features

- Cleaning of:
 - Exhaust pipes from Ø 60 mm
 - Air ducts with round cross-section from Ø 63 mm
 - Flat oval tunnel profile cross-section from 50 x 100 mm
- For pushing up the telescopic sealing bladder
- Very flexible thanks to short thread transitions and flexible deflection piece
- Digital metre count
- GRP rod with abrasion-resistant PA sheath and protective hose
- Precisely adjustable freewheel brake and transport lock
- Compact for pushing the sealing bladders

Technical data

Cage diameter	42 cm
Weight	Approximately 2 kg incl. 20 / 30 m GRP rod
Freewheel brake	Precisely adjustable
GRP rod	Ø 6 mm
Stainless steel end piece	M5

Wöhler H 420 viper M5
15 m

Additionally with deflector and guide ball M5 for holding mini-punching stars or M5 tube brushes
Article no. 4274

Wöhler H 420 Viper
20m - with digital meter counter

GRP Rod 6 mm Ø, 20 m with stainless steel end pieces M10, quick change star holder to hold stars and GRP push head for mounting stars (without stars)
Article no. 3798

Brushes/ stars must be purchased separately.

Wöhler Viper L

Cleaning of medium sized chimneys, ventilation and ground pipes

Features

- Cleaning of:
 - Medium sized chimneys
 - Air ducts > 250 mm
 - Ground pipes
- GRP rod with abrasion – resistant PA coat, protective hose
- Very stable and therefore suitable for pushing very large threaded stars
- Can be used as a guiding aid together with Wöhler VIS camera trolley, Wöhler VIS 500 cable camera and stabilising sleeve

Technical data

Cage diameter	59 cm
Weight	Approximately 4 kg incl. 15 / 20 m GRP rod
Freewheel brake	Precisely adjustable, additional transport lock via locking lever
GRP rod	Ø 9 mm
Stainless steel end piece	M10

Wöhler Viper L
15 m

Scope of delivery: GRP Rod Ø 9 mm, 15 m with two stainless steel end pieces M10, GRP-starholder Ø 28 mm, protection tube 80 cm long
Article no. 9412

Wöhler Viper L
20 m

Scope of delivery: GRP Rod Ø 9 mm, 20 m with two stainless, steel end pieces M10, GRP-starholder Ø 28 mm, protection, tube 80 cm long
Article no. 9413

Brushes/ stars must be purchased separately.



Wöhler online shop

Discover all the details about the product and much more. Plus, ordering is easy!

wohler.co.uk/P_17



Wöhler online shop

Discover all the details about the product and much more. Plus, ordering is easy!

wohler.co.uk/P_14



Wöhler Viper XL / XXL

Cleaning of large chimneys, air and ground pipes



Features

- Inspection and Cleaning of:
 - Large chimneys
 - Air ducts
 - Basic ducts
 - Air-ground heat exchanger from Ø 250 mm
- GRP rod with abrasion – resistant PA sheath
- Very stable and therefore suitable for pushing very large linen stars or threaded brushes
- For holding line stars and threaded brushes

Technical data	
Basket diameter	80 / 80 / 100 cm
Width	50 / 50 / 50 cm
Height	93 / 94 / 116 cm
Weight	18.8 / 21.6 / 34.2 kg incl. 30 / 50 / 100 m GRP rod
GRP rod	Ø 11 mm
Stainless steel end piece	M10

Wöhler Viper XL
30 m

Scope of delivery: Wöhler Viper XL, viper cage 80 cm and wheels, GRP rod Ø 11mm, 30 m long, stainless steel end piece M10, star holder adaptor (without stars)

Article no. 4399

Wöhler Viper XL
50 m

Scope of delivery: Wöhler Viper XL, viper cage 80 cm and wheels, GRP rod Ø 11mm, 50 m long, stainless steel end piece M10, star holder adaptor (without stars)


Article no. 3332

Wöhler Viper XXL
100 m

Scope of delivery: Wöhler Viper XXL, viper cage 100 cm and wheels, GRP rod Ø 11mm, 100 m long, stainless steel end piece M10, star holder adaptor (without stars)

Article no. 3337

Brushes/ stars must be purchased separately.

Stars		Article no.
	Star hard Steel flat wire 28 mm / 1.1" inner hole diameter 120 wire ends Ø 25 cm / 10"	13625
	Ø 30 cm / 12"	13630
	Ø 30 cm / 12" 80 wire ends	13230
	Ø 30 cm / 12" pack of 5 80 wire ends	132305
	Ø 35 cm / 13.8" 80 wire ends	13235
	Ø 35 cm / 13.8" pack of 5	132355
	Ø 35 cm / 13.8" 120 wire ends	13635
	Ø 40 cm / 15.7"	13240
	Star very hard Steel flat wire 28 mm / 1.1" inner hole diameter 120 wire ends 40 cm / 15.7"	13640
	Star Extra Large Ø 50 cm / 20"	13350
	Ø 60 cm / 23.6"	13360
	Ø 70 cm / 27.56"	13370
	Ø 80 cm / 31.5"	13380
	Star soft Stainless steel flat wire 28 mm / 1.1" inner hole diameter Ø 15 cm / 6"	14015
	Ø 15 cm / 6" pack of 3	140153
	Ø 20 cm / 8"	14020
	Ø 20 cm / 8" pack of 3	140203
	Ø 25 cm / 10"	14025
	Ø 25 cm / 10" pack of 3	140253
	Ø 30 cm / 12"	14030
	Ø 30 cm / 12" pack of 3	140303
	Star medium hard Stainless steel flat wire 28 mm / 1.1" inner hole diameter Ø 20 cm / 8"	14120
	Ø 20 cm / 8" pack of 3	141203
	Ø 25 cm / 10"	14125
	Ø 25 cm / 10" pack of 3	141253
	Ø 30 cm / 12"	14130
	Ø 30 cm / 12" pack of 3	141303
	Ø 35 cm / 13.8"	14135
	Ø 35 cm / 13.8" pack of 3	141353
	Ø 40 cm / 15.7"	14140
	Stars Set Stainless Steel Flat Wire · 3 Stars, flat wire, 20 cm / 8" Ø soft · 6 Stars, flat wire, 25 cm / 10" Ø medium hard · 6 Stars, flat wire, 30 cm / 12" Ø medium hard	3709
	Star hard Stainless steel flat wire 28 mm / 1.1" inner hole diameter Ø 25 cm / 10"	14225
	Ø 25 cm / 10" pack of 3	142253
	Ø 30 cm / 12"	14230
	Ø 30 cm / 12" pack of 3	142303
	Ø 35 cm / 13.8"	14235
	Ø 35 cm / 13.8" pack of 3	142353
	Ø 40 cm / 15.7"	14240

Stars		Article no.
	Star, HT 28 mm / 1.1" inner hole diameter temperature resistant up to 250 °C Ø 15 cm / 6"	12815
	Ø 15 cm / 6" pack of 2	128152
	Ø 18 cm / 7.1"	12818
	Ø 18 cm / 7.1" pack of 2	128182
	Ø 20 cm / 8"	12820
	Ø 20 cm / 8" pack of 2	128202
	Ø 25 cm / 10"	12825
	Ø 25 cm / 10" pack of 2	128252
	Ø 30 cm / 12"	12830
	Ø 30 cm / 12" pack of 2	128302
	Star Perlon 28 mm / 1.1" inner hole diameter Ø 15 cm / 6"	13715
	Ø 18 cm / 7.1"	13718
	Ø 20 cm / 8"	13720
	Ø 25 cm / 10"	13725
	Ø 30 cm / 12"	13730
	Ø 40 cm / 15.7"	24
	Ø 50 cm / 20"	3141
	Star Stainless Steel crimped wire 28 mm / 1.1" inner hole diameter Ø 15 cm / 6"	14315
	Ø 20 cm / 8"	14320
	Ø 25 cm / 10"	14325
	Ø 30 cm / 12"	14330
	Ø 50 cm / 20"	2210
	Ø 70 cm / 27.56"	238
	Star soft Steel flat wire, soft 28 mm / 1.1" inner hole diameter 80 wire ends Ø 15 cm / 6"	13015
	Ø 20 cm / 8"	13020
	Ø 25 cm / 10"	13025
	Ø 30 cm / 12"	13030
	Star medium hard Steel flat wire 28 mm / 1.1" inner hole diameter 80 wire ends Ø 25 cm / 10"	13125
	Ø 25 cm / 10" pack of 5	131255
	Ø 30 cm / 12"	13130
	Ø 30 cm / 12" pack of 5	131305
	Ø 35 cm / 13.8"	13135
	Ø 35 cm / 13.8" pack of 5	131355
	Ø 40 cm / 15.7"	13140
	Star hard Steel flat wire 28 mm / 1.1" inner hole diameter 80 wire ends Ø 20 cm / 8"	13220
	Ø 25 cm / 10"	13225
	Ø 25 cm / 10" pack of 5	132255

Brushes		Article no.
	Threaded Brush soft Stainless steel flat wire 2 layers M10 thread Ø 12 cm / 4.7"	18912
	Ø 15 cm / 6"	18915
	Ø 18 cm / 7.1"	18918
	Ø 20 cm / 8"	18920
	Threaded brush medium hard Stainless steel flat wire 2 layers M10 thread Ø 20 cm / 8"	18420
	Ø 25 cm / 10"	18425
	Ø 30 cm / 12"	18430
	Threaded Brush hard Stainless steel flat wire, hard 2 layers M10 thread Ø 25 cm / 10"	18525
	Ø 35 cm / 13.8"	18535
	Threaded brush soft Spring steel flat wire 2 layers M10 thread Ø 15 cm / 6"	17915
	Ø 18 cm / 7.1"	17918
	Ø 20 cm / 8"	17920
	Threaded brush medium hard Spring steel flat wire 2 layers M10 thread Ø 15 cm / 6"	17015
	Ø 20 cm / 8"	17020
	Ø 25 cm / 10"	17025
	Ø 30 cm / 12"	17030
	Ø 35 cm / 13.8"	17035
	Threaded brush medium hard Spring steel flat wire 3 layers M10 thread Ø 15 cm / 6"	17415
	Ø 20 cm / 8"	17420
	Ø 25 cm / 10"	17425
	Ø 30 cm / 12"	17430
	Ø 35 cm / 13.8"	17535
	Threaded Brush Stainless steel crimped wire 2 layers M10 thread Ø 15 cm / 6"	19115
	Ø 20 cm / 8"	19120
	Ø 25 cm / 10"	19125
	Ø 30 cm / 12"	19130
	Threaded Brush Perlon 2 layers M10 thread Ø 15 cm / 6"	18715
	Ø 18 cm / 7.1"	18718
	Ø 20 cm / 8"	18720
	Ø 25 cm / 10"	18725
	Ø 30 cm / 12"	18730
	Ø 35 cm / 13.8"	18735
	Ø 40 cm / 15.7"	18740
	Ø 50 cm / 20"	18750
	Ø 60 cm / 23.6"	18760

Brushes		Article no.
	Threaded Brush, HT 2 layers with M10 thread temperature resistant up to 250°C Ø 15 cm / 6"	19815
	Ø 18 cm / 7.1"	19818
	Ø 20 cm / 8"	19820
	Ø 25 cm / 10"	19825
	Threaded Brush Perlon Trimming 2.0 mm / 0.08" with thread M10 Ø 20 cm / 8" 4 layers	4427
	Ø 35 cm / 13.8"	4424
	Threaded Brush Perlon Trimming 1.2 mm / 0.05" 2 layers with thread M10 Ø 20 cm / 8"	4332
	Ø 25 cm / 10"	3564
	Ø 30 cm / 12"	3500

Holders		
	Quick Change Star Holder Ø 28 mm for GRP rods Ø 7 - 11 mm for holding stars, one single movement opens the quick change star holder	9539
	Star Holder Ø 28 mm for holding stars for GRP rods Ø 7 - 11 mm and steel rods	7979
	Stainless Steel Star Holder Ø 28 mm for holding stars for steel rods and GRP rods Ø 7 - 11 mm and steel rods with aluminium cone stainless steel cap and stainless steel screw M10	5280
	Aluminium End Ball with M10 thread	1448
	Stainless Steel Rod Quick Connector with double-sided thread M10 with 17 mm wrench size, with union nut and anti-rotation lock via square spigot	1409
	Brass Rod Connector with double-sided thread M10 for connecting several GRP rods	1454
	Steel Chisel with M10 thread	1457
	Stainless Steel Roller Opener with M10 thread	1455
	Harpoon with M10 thread and barb	1459

Rods		
	GRP Rod with 1 stainless steel end piece M10 spare rod for viper M Ø 4.5 mm 15 m	9703
	GRP Rod with 1 stainless steel end piece M10 spare rod for viper M Ø 7 mm 15 m	7015
	Ø 7 mm 20 m	7020
	GRP Rod with stainless steel end piece M10 on both sides replacement rod for viper L Ø 9 mm 15 m	9015
	GRP Rod Ø 9 mm 20 m	9020
	GRP Rod Repair Kit with stainless steel end piece with 2 M4 cross holes, 2 grub screws and allen wrench Ø 4.5 mm	3687
	GRP Rod Repair Kit with stainless steel end piece with 2 M4 cross holes, 2 grub screws and allen wrench Ø 7 mm	3696
	Ø 9 mm	3690
	Ø 11 mm	3691

Accessories		Article no.
    	Star Holder M12 x 22 RP 72	39753
	Brake Adjustment Knob for handy viper	52388
	Protection Hose for sweeper coil 30"	9417
	Viper Rubber Feet	37703
Guidance End Ball with M5 threaded pin for the GRP rod Ø 4.5 mm for fastening the PEK mini hole stars		8063

Wöhler Snap & Sweep® System

Effective sweeping with rotating cleaning tools



Features

- One system - many applications: Freestanding stainless steel flues, large-volume flues, large air ducts, basic cleaning before renovation, removal of jackdaw nests
- Stable plastic plug-in connection - cleaning without damage even in stainless steel flues, air ducts
- Snap lock for quick and easy handling, even with gloves
- Gentle sweeping with bump brushes and thread twists, powerful sweeping with chains
- One-man operation: You can easily do it alone
- Rotary drive with commercially available cordless screwdriver
- The perfect rod length for every work step
- Comfortable and clean transport in the carrying bag

Technical data

Material	Plastic	
Length	1 m	
Operating temperature	Soft	-5...85 °C
	Regular	-20...85 °C
	Strong	-20...85 °C
Connections	1 plug-in connection and 1 receptacle each	
Colour	Soft	Blue
	Regular	Black
	Strong	Red
Flexural rigidity	Soft	ca. 47 kN cm ²
	Regular	ca. 118 kN cm ²
	Strong	ca. 189 kN cm ²

Wöhler Snap & Sweep® Soft

Scope of delivery: 10 cleaning rods with snap in quick connectors, carrying bag rods, perlon brush Ø 25 cm / 0,8 mm, universal rotary head with nylon wires 3 mm / 6 x 50 cm, drill adaptor, protection bag brushes, Push rod 0.5 m with handle piece

Article no. 8365

Wöhler Snap & Sweep® Regular

Scope of delivery: 10 cleaning rods, length: each 1 m, Perlon brush, Ø 20 cm, Carrying bag for rods Wöhler Snap&Sweep, Bag for brushes and rotary head, Universal rotary head, 6 nylon wires 30 cm, drill adaptor, push rod 0,5m with handle piece

Article no. 6898



Push rod 0.5 m with handle piece
Wöhler Snap & Sweep®
Article no. 11270



Wöhler online shop


Discover all the details about the product and much more. Plus, ordering is easy!

wohler.co.uk/P_15210



Accessories		Article no.
	Cleaning rod 1m Wöhler Snap & Sweep® Soft	1287
	Cleaning rod 1m Wöhler Snap&Sweep® Regular	1222
	Cleaning Rod 1m Wöhler Snap & Sweep® Strong	1800
	Rotary Head, Nylon wires Universal rotary head Wöhler Snap&Sweep, 6 pcs., 3 mm, length: each 50 cm	8784
	Rotary Head, chains Universal rotary head Wöhler Snap&Sweep, Stainless steel chains, 6 pcs., 3 mm, length: each 15 cm	8785
	Universal rotary head with snap in connectors	8786
	Push head adapter threaded/perlon brush Wöhler Snap & Sweep® with M10 thread for holding M10 threaded & perlon brush	8978
	Push head adapter large stars Threaded Brushes Wöhler Snap & Sweep® Stainless steel attachment with female thread M10 for holding up to two line stars, brush heads and harpoon with M10 thread	10065
	Nylon wire Ø 3 mm / 6 x 30 cm	24468
	Ø 3 mm / 6 x 50 cm	24469
	Stainless steel chain VA Ø 3 mm / 6 x 15 cm	24466
	VA Ø 3 mm / 6 x 25 cm	24467
	Milling head bird's nests Wöhler Snap & Sweep Thread M10	6309
	Perlon Brush with Snap & Sweep® adaptor Ø 15 cm / 6"	14415
	Ø 18 cm / 7.1" 0.8 mm / 0.03"	14418
	Ø 20 cm / 8" 0.8 mm / 0.03" 2 layers	14420
	Ø 25 cm / 10" 0.8 mm / 0.03" 2 layers	14425
	Ø 30 cm / 12" 1.0 mm / 0.04" 2 layers	14430
	Ø 35 cm / 13.8" 1.2 mm / 0.05" 2 layers	14435
	Ø 40 cm / 15.7" 2.0 mm / 0.08" 4 layers	15440

Accessories		Article no.
	Drill adaptor for cordless screwdriver	2942
	Carrying bag for rods	61062
	Protection bag for sweeping Tools	55703
	Repair Set incl. connector end piece, connector start piece, pan head screws Ø 2.5 x 10 mm (6 pcs.)	11172

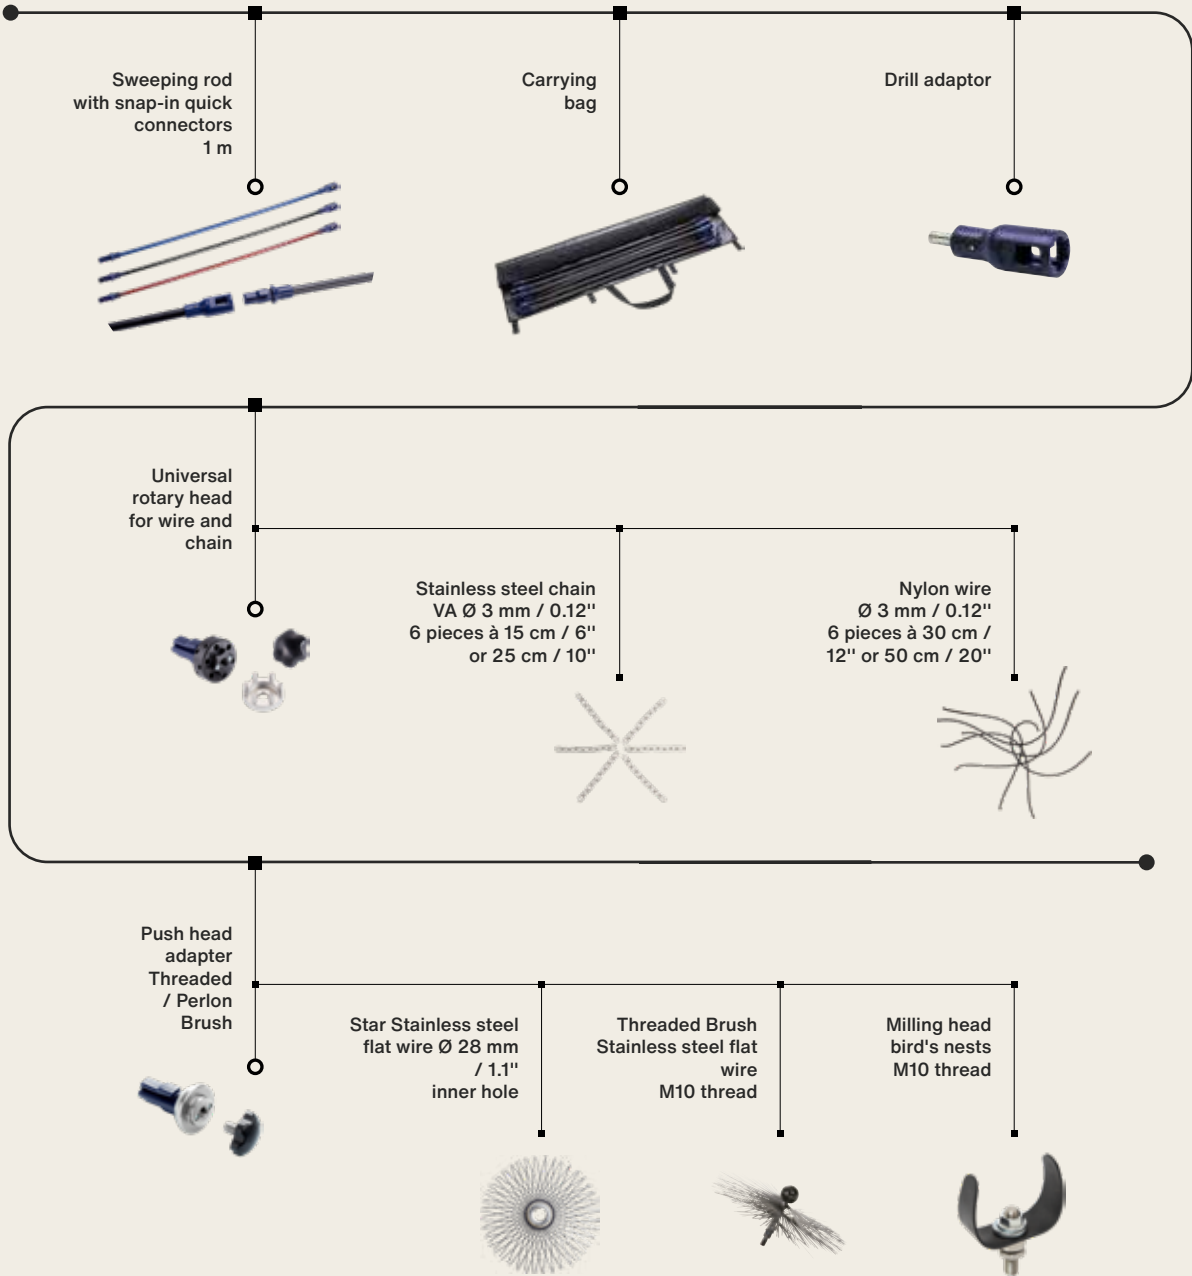

Wöhler Rotary Viper Heavy-Duty

Effective chimney cleaning



Features

- Cleaning of:
 - Chimneys with hard and glossy soot, creosote
- Thorough, fast and convenient cleaning
- The stable bending shaft can be pushed up and lowered in the chimney without a guide rod
- The integrated slip clutch between the drill and the bending shaft increases safety
- Right-hand / left-hand rotation possible, thus particularly high cleaning effect

Technical data

Coating	crush / buckling resistant Ø 20 mm
Length	7 / 10 m
Connection cleaning attachment	M10 thread
Spigot for drill chuck	Ø 10 mm
End pieces	ball bearing
Inner Core	Ø 10 mm right / left winding

Wöhler Rotary Viper Chimney

7 m

Scope of delivery: Wöhler Rotary Viper Chimney, safety clutch, end piece for holding chains and 3 m stainless steel chain Ø 5 mm

Article no. 7437

Wöhler Rotary Viper Chimney

10 m

Scope of delivery: Wöhler Rotary Viper Chimney, safety clutch, end piece for holding chains and 3 m stainless steel chain Ø 5 mm

Article no. 7440

Accessories

		Article no.
	Endpiece for holding chains for rotary viper heavy duty Stainless steel, to use with the rotary viper, with 4 screws M10 for the attachment of the chains	7540
	Chain SS Ø 5 mm, 3 m long	3108
	Grease press for Wöhler Rotary Viper with multi-purpose grease 65 ml	3436

Sealing elements for cleaning tasks

		Article no.
	Sealing Element, round for cleaning tasks without hole Height 15 cm Ø 11 - 15 cm	8041
	Sealing Element, square for cleaning tasks with hole Height 15 cm hole Ø 4 cm 12 x 12 cm / 19 x 19 cm	40103
	Wöhler Sealing Element for sealing fireplace doors with hole Height 11.5 cm 18.5 x 22.5 cm 27.5 x 34.5 cm	3430
	Wöhler Sealing Element for sealing fireplace doors with hole Height 8.5 cm 13.5 x 19.5 cm 17.5 x 23.5 cm	50000
	Wöhler Sealing Element for sealing pipe connections with hole Height 12.5 cm Ø 13 - 18 cm	54668
	Sealing Element Square for cleaning tasks with hole Height 15 cm hole Ø 4 cm 11 x 23 cm / 19 x 31 cm	50666
	Wöhler Sealing Elements Set to seal chimney doors 14 x 20 cm or similar measurements as well as pipe connections 10 - 15 cm or 15 - 20 cm	3708
	Sealing Element Set Round for sealing during the cleaning of air ducts without hole Contains 4 sealing elements diameters from Ø 11 mm - Ø 33 cm	7522

Wöhler online shop

Discover all the details about the product and much more. Plus, ordering is easy!

wohler.co.uk/P_13



Wöhler Rotary Viper Chimney

Effective chimney cleaning



- Features**
- Cleaning of:
 - Connectors Ø 80 - 250 mm
 - Air ducts in tiled stoves
 - Air ducts Ø 80 - 250 mm
 - Brush head pushes the soot out of the pipe and is easy to guide due to ergonomic shape
 - End piece very short, particularly advantageous for narrow bends
 - Mains-independent operation with cordless screwdriver
 - Right-hand / left-hand rotation possible, thus particularly high cleaning effect



Technical data	
Length	2.5 / 4 m
Max. torque	Right rotation 3 Nm / left rotation 1.5 Nm
Operating temperature	0...80 °C
Connection for cleaning attachment	M10

Wöhler Rotary Viper Chimney
M10 – 2.5 m
Scope of delivery: Wöhler Rotary Viper Chimney M10 - 2.5 m, Perlon brush head Ø 180 mm
Article no. 8423

Wöhler Rotary Viper Chimney
M10 – 4 m
Scope of delivery: Wöhler Rotary Viper Chimney M10 - 4 m, Perlon brush head Ø 180 mm
Article no. 8424

Wöhler Rotary Viper M10

Cleaning of ventilation systems

- Features**
- Effective cleaning of dryer vents, duct and piping
 - CW/CCW rotation
 - Due to a small end piece also applicable for smaller bends
 - Very light weight 1.3 kg
 - Extremely flexible shaft
 - Can be operated with cordless screwdriver

Technical data	
Length	1.5 / 3 / 5 / 10 / 15 m
Max. torque	Clockwise rotation 3 Nm Counterclockwise rotation 1.5 Nm
Operating temperature	0...80 °C
Connection cleaning attachment	M10 thread

Wöhler Rotary Viper M10
1.5 m
Scope of delivery: Wöhler Rotary Viper Ventilation - 1.5 m, brush head perlon Ø 18 cm

Article no. 4882

Wöhler Rotary Viper M10
3 m
Scope of delivery: Wöhler Rotary Viper Ventilation - 3 m, brush head perlon Ø 18 cm

Article no. 4867

Wöhler Rotary Viper M10
5 m
Scope of delivery: Wöhler Rotary Viper Ventilation - 5 m, brush head perlon Ø 18 cm

Article no. 4832

Wöhler Rotary Viper M10
Ventilation Set -5 m
Scope of delivery: Wöhler Rotary Viper Ventilation - 5 m, brush head perlon Ø 18 cm, brush head perlon Ø 25 cm, threaded brush perlon Ø 30 cm

Article no. 7511

Wöhler Rotary Viper M10
10 m
Scope of delivery: Wöhler Rotary Viper Ventilation - 10 m, brush head perlon Ø 18 cm

Article no. 4866

Wöhler Rotary Viper M10
15 m
Scope of delivery: Wöhler Rotary Viper Ventilation - 15 m, Brush head perlon Ø 18 cm

Article no. 4880



Wöhler online shop

Discover all the details about the product and much more. Plus, ordering is easy!

wohler.co.uk/P_13810



Wöhler online shop

Discover all the details about the product and much more. Plus, ordering is easy!

wohler.co.uk/P_13820



Accessories		Article no.
	Brush Head Perlon with M10 thread, Semicircular shape enables very good guidance in the tube Ø 8 cm	7146
	Ø 10 cm	7147
	Ø 12.5 cm	1458
	Ø 18 cm	1466
	Ø 25 cm	7102

Wöhler Rotary Viper M5

Flexible with wiper and brush head

Features

- Cleaning of:
 - Round air ducts from Ø 63 mm
 - Flat oval ducts from 50 x 100 mm
 - Controlled domestic ventilation
 - Ducts contaminated with grinding dust
 - Dryer vents
- Very flexible shaft and head:
 - Small perlon head Ø 14 cm
 - Wiping head to remove dust
- Can be operated with cordless screwdriver

Technical data

Length	5 / 15 m
Max. torque	Clockwise rotation 3 Nm Counterclockwise rotation 1.5 Nm
Operating temperature	0...80 °C
Connection cleaning attachment	M5 thread



Wöhler Rotary Viper Vent 5 m
with wipe and brush head

Scope of delivery: Wöhler Rotary Viper Vent 5 m, Brush head, perlon Ø 140 mm, Wipe head with two wiping cloths each Ø 150 mm

Article no. 7192

Wöhler Rotary Viper Vent 15 m
with wipe and brush head

Scope of delivery: Wöhler Rotary Viper Vent 15 m, Brush head, perlon Ø 140 mm, Wipe head with two wiping cloths each Ø 150 mm

Article no. 4172

Accessories		Article no.
	Wiping cloths Ø 15 cm 10 pieces	4185
	Adaptor wipe head for fixing wiping cloths to rotary viper duct	4139
	Brush head Perlon Ø 14 cm	4169

CLEANING

APPLICATION KNOWLEDGE AROUND THE TOPIC OF CLEANING TECHNOLOGY

- ➔ Here you will find helpful knowledge about applications around cleaning technology.
- ➔ Cleaning of ventilation systems / air ducts with brushes
- ➔ Cleaning of a ventilation system / air duct with compressed air
- ➔ Sewer Pipe Cleaning With A Drain Cleaning Machine
- ➔ Chimney cleaning

Scan now!



wohler.co.uk/cleaning



Wöhler online shop

Discover all the details about the product and much more. Plus, ordering is easy!
[wohler.co.uk/P_13830](https://www.wohler.co.uk/P_13830)



Wöhler SI 400 Smart Inspection Camera

Quick inspection with HD quality of flue gas pipes, air ducts and chimneys



Features

- Everything is visible with the sharp HD picture and bright lighting
- Small, handy camera for quick use
- Intuitive operation via the free Wöhler Smart Inspection App
- Ability to connect it to two devices at once
- Ability to send photos and videos instantly to customers or colleagues via the Wöhler Smart Inspection App
- Signal range up to 20 metres when not obstructed: Video recording is guaranteed even if the WiFi connection is interrupted

Technical data

Camera head dimensions	Ø 40 mm
Connection	M5 thread compatible with all Wöhler Vipers with M5 or M10 thread (with adaptor) also compatible with Industry Sweeping Rods
Image transmission	Via the device's internal WiFi in the Wöhler Smart Inspection App
Image quality:	HD

Wöhler SI 400 Smart Inspection Camera

Basic Set

Scope of delivery: Wöhler SI 400 Smart Inspection Camera with Li-Ion battery, 32 GB Memory Card, Bag, Guidance Ball, Protection Sleeve, adaptor M5-M10

Article no. 12403

Wöhler SI 400 Smart Inspection Camera

Comfort Set

Scope of delivery: Wöhler SI 400 Smart Inspection Camera with Li-Ion battery, Bag, Guidance Ball, Protection Sleeve, 32 GB Memory Card, Deflection piece, rigid

Article no. 12405

Wöhler SI 400 Smart Inspection Camera

Professional Set

Scope of delivery: Wöhler SI 400 Smart Inspection Camera, Bag, Guidance Ball, Protection Sleeve, 32 GB Memory Card, VIS Centering Brush, Thread Adapter

Article no. 12401

Accessories



Thread Adapter M5 to M10
For use with the Wöhler SI 400 Smart Inspection Camera with GRP rods with M10 internal thread.

Article no.
10276
3854
3634
10415
10396



VIS Centering Brush
Centres the GRP camera rod and is used to guide the camera head in conjunction with the camera roller guide and/or with the extension element or extension piece, for GRP rods up to Ø 7 mm
Scope of delivery: Wöhler rod element Ø 20 cm with 6 strip brushes, threaded on one side for camera rods



Guidance Ball
Ø 30 x 27 mm
for GRP camera rods Ø 6, Ø 6.5 and Ø 7 mm as well as for miniature camera heads improves ability to go through bends for miniature camera head 26mm for camera heads and rods



Protection Sleeve with recess
Easy installation and secure hold thanks to clamping lever, particularly good visibility thanks to a round recess in the dome area for Wöhler SI 400



Deflection piece, rigid
For inspecting the chimney from below.
Wöhler SI 400

Wöhler online shop

Discover all the details about the product and much more. Plus, ordering is easy!

wohler.co.uk/P_200



Wöhler VIS 360 Inspection Camera

For visual inspection of ducts, exhaust systems and ventilation systems



Features

- 360° pan and 180° tilt camera head covers every angle and even hard-to-reach areas
- Robust case system – open it up, switch it on, get started
- Removable monitor for flexible control, even in difficult working conditions
- Camera rod can be removed and cleaned separately

Technical data

Monitor	TFT-Display	7" / 16:9 Format
	Resolution	1,024 x 600 px
	Connection cable	2 m
	Power supply	USB-C 5 V / 3 A 3.7 V / 11.4 Ah
Camera rod	Operating time	4 h
	Length	30 m Electronic metre counter

Wöhler VIS 360 Inspection Camera
Camera head Ø 40 mm, camera rod 30 m

Scope of delivery: Wöhler VIS 360 monitor unit with 7" TFT widescreen colour monitor incl. 2 m connection cable, Anti-glare screen, Lithium-ion battery, Wöhler pan/tilt camera head Ø 40 mm, Camera rod 6.5 mm – 30 m long (removable for cleaning), USB mains charger with USB-C cable, Double-shell case, 3 spare plastic domes

Article no. 14367

Wöhler online shop

Discover all the details about the product and much more. Plus, ordering is easy!

wohler.co.uk/P_219



For questions about the Power Partner Programme
Phone: 01977 806040
E-Mail: powerpartner@wohler.co.uk



TOGETHER WE CAN ACHIEVE MORE



Reward Points for Partners

Secure exclusive Power Partner terms and conditions.

5 % Discount

on every service, calibration & repair

10 % Discount

on every purchase

Power Partner Reward Points

Our points system is all about rewarding you for your performance! Every purchase you make contributes to your Power Points right from the very first pound. In exchange, you gain access to exclusive services. Simply choose which service you'd like to use your Power Points for!



Free shipping



Wöhler baseball cap,
Wöhler thermo flask or
Wöhler rucksack



Exclusive
Power Partner events



A detailed overview of the rewards and other benefits can be found at wohler.co.uk/power-partner

Wöhler VIS 500 Visual Inspection System

Visual duct, flue gas and ventilation system inspection



Features

- Damage analysis, non-destructive inspection and documentation of:
 - 87° bends
 - Sewer pipes from Ø 40 mm
 - House connections up to Ø 200 mm
 - Air pipes and ducts
 - Intermediate ceilings, cavities, shafts
 - Industrial machines / plants
- The universal camera for your applications: Interchangeable camera head, sound and voice recording via headset and different rod lengths.
- Waterproof rotatable and pan and tilt camera head Ø 40 mm for an all-round view
- Easy operating and reporting with the Wöhler video inspection app
- Bright illumination with camera LEDs and optional additional lighting
- Intuitive handling with uniform operating concept of the Wöhler VIS series

Technical data

Monitor	TFT display	7" / 16:9 Format
	Resolution	1,024 x 600 px
	Connection cable	2 m
	Power supply	USB-C 5 V / 3 A 3.7 V / 11.4 Ah Lithium-Ionen Akku
	Operating time	6 h
Camera rod	Length	20 / 30 m electr. metre counting

Wöhler VIS 500 INT as a Set for rods

Camera head Ø 40 mm, 20 m camera cable

Scope of delivery: Wöhler VIS 500 Monitor incl. power supply unit with 4 interchangeable adapters, Pan & tilt camera head Ø 40 mm, Camera cable 20 m, Cable reel, Aluminium Case XXL, Wöhler Light Ring 26/40, detachable, Stabilisation sleeve aluminium, Centering Brush Extension Ø 20 cm, Protection Sleeve, Aluminum Transport case XXL

Article no. 12176

Wöhler VIS 500 Inspection Camera INT

Camera head Ø 40 mm, 20 m camera cable

Scope of delivery: Wöhler VIS 500 monitor unit with 7", Glare shield, Lithium-ion battery, Carrying strap system with mounting plate for monitor unit, Wöhler turn/swivel camera head Ø 40 mm, pluggable, Camera cable with metric - 20 m long, 3 spare plastic domes, USB mains charger with USB-C cable, Plastic case

Article no. 12342

Wöhler VIS 500 Inspection Camera INT

Camera head Ø 40 mm, cable reel 20 m

Scope of delivery: Wöhler VIS 500 Monitor incl. power supply with 4 world adaptors, Pan & tilt camera head Ø 40 mm, Camera cable 20 m on cable reel, Aluminum Transport case XXL, Carrying strap system

Article no. 12141

Wöhler VIS 500 Inspection Camera

Camera head Ø 40 mm, camera rod 30 m

Scope of delivery: Wöhler VIS 500 monitor unit with 7" TFT widescreen colour monitor incl. 2 m connection cable (monitor removable), Glare protection, Lithium-ion battery 6 h operation time, Data storage: Internal memory 4 GB expandable with USB stick, Wöhler pan and tilt camera head Ø 40 mm (detachable), Camera rod Ø 6.5 mm / 30 m long (removable for cleaning), USB mains charger with USB-C cable, Double sided suitcase, Replacement plastic domes (3 pieces)

Article no. 11508



Wöhler online shop

Discover all the details about the product and much more. Plus, ordering is easy!

[wohler.co.uk/P_18820](https://www.wohler.co.uk/P_18820)



General accessories for Wöhler VIS

Accessories		Article no.
	Aluminium Case XXL for Wöhler VIS 350 / 500 48 x 27 x 48 cm	5824
	Wöhler Miniature Camera Head Ø 26 mm Colour, detachable, with pouch for Wöhler VIS 500 Camera head with flexible connection (PAL) for GRP camera rod	420
	Wöhler Camera Head Ø 40 mm detachable, pan and tilt for Wöhler VIS 500 flexible connection to camera rod	870
	Wöhler Light Ring 26/40, detachable for camera heads Ø 26 mm / Ø 40 mm for Wöhler VIS 500 Only for detachable camera heads – the additional lighting with 18 white LEDs is mounted between the camera head and the camera pole. Power is supplied via the video inspection system. Ø- Outside 53 mm	11398
	Protection Sleeve for Wöhler Camera Head Ø 40 mm for Wöhler VIS 360 / 500 Easy installation and secure hold thanks to clamping lever, particularly good visibility thanks to a round recess in the dome area	2641
	Camera Roller Guide for Wöhler VIS 360 / 500 suitable for camera heads and rods	3681
	VIS Centering Brush for camera heads and rods for Wöhler VIS 360 / 500 Ø 20 cm, with 6 strip brushes as spacers, can be fixed directly behind the camera head	3850
	VIS Centering Brush for camera rods for Wöhler VIS 360 / 500 Wöhler rod element Ø 20 cm with 6 strip brushes, threaded on one side	3854
	Guidance Ball for camera heads and rods for Wöhler VIS 360 / 500 Ø 30 x 27 mm for GRP camera rods Ø 6, Ø 6.5 and Ø 7 mm as well as for miniature camera heads improves ability to go through bends for miniature camera head 26 mm	3634
	Wöhler L 200 Locator for camera heads Ø 26 / 40 mm for Wöhler VIS 360 / 500 Wöhler L 200 Locator, Telescopic rod, Headphones, USB power supply unit with micro USB cable, Lithographic chalk (12 pieces, yellow), Plastic case	7430
	Guidance Weight for Wöhler VIS 360 / 500 for camera heads and rods for lowering the camera head – compensates for the bending of the GRP camera rod. Stainless steel guide weight 740 g	3857
	Anti Slide Mat for Wöhler VIS 360 / 500 30 x 12 cm washable up to 60 °C	3252
	Glass Dome for Wöhler VIS 360 / 500 for Wöhler Camera Head Ø 40 mm	13674
	Replacement Plastic Domes (10 pcs.) for Wöhler VIS 360 / 500 for Wöhler Camera Head Ø 40mm	3675

Accessories		Article no.
	Carrying Strap System for Wöhler VIS 500 with mounting plate for monitor unit	6921
	Camera holder for Wöhler VIS 500 for pan and tilt camera head Ø 40 mm	3720
	Wöhler Camera Spring Guide for Wöhler pan/tilt camera head Ø 40 mm for Wöhler VIS 500	7081
	Wöhler Lowering Aid for Wöhler VIS 500 made of stainless steel / extendable from 16 - 40 cm the roller remains centred even when the lowering aid is extended particularly advantageous when working with camera head and camera cable	5706
	Magnetic Holder Monitor for Wöhler VIS 500	2939
	Starter Set for Wöhler VIS 400 / 500 Camera spring guide for camera head, camera holder, light ring 26/40, detachable	4439
	Wöhler Camera Cable for Wöhler VIS 400 / 500 with metric marking 20 m	9172
	30 m	7812
	Wöhler Camera Extension Cable 10 m for Wöhler VIS 400 / 350 / 500 with metric marking The camera cable can be extended to a maximum length of 50 metres without interference.	8636

Wöhler Glass Mirror

Exhaust gas system check



Features

- Inspection of:
 - Objects hard to reach
 - Chimneys
 - Buildings
- Glass mirrors with high optical quality
- Mirrors can be rotated and tilted
- Protected by aluminium frame
- Practical telescopic handle – easy to pull out from 20 to 99 cm

Wöhler Glass Hand Mirror
5 x 8 cm

with leather cover

Article no. 5064

Wöhler Glass Mirror Small
with telescopic handle

Scope of delivery: Glass mirror 2.6 x 7 cm, Imitation leather cover, Telescopic handle extendable up to 99 cm, Ball joint (can be swivelled and tilted)

Article no. 8064

Wöhler Glass Mirror Medium
with telescopic handle

Scope of delivery: Glass mirror 5 x 8 cm, Imitation leather cover, Telescopic handle extendable up to 99 cm, Ball joint (can be swivelled and tilted)

Article no. 8059

Wöhler Glass Mirror Large
with telescopic handle

Scope of delivery: Glass mirror 8 x 15 cm, Imitation leather cover, Telescopic handle extendable up to 99 cm, Ball joint (can be swivelled and tilted)

Article no. 8087

Wöhler online shop

Discover all the details about the product and much more. Plus, ordering is easy!

wohler.co.uk/P_22



Wöhler Chimney Mirror

Exhaust gas system check



Features

- Inspection of:
 - Objects hard to reach
 - Chimneys
- Robust metal mirror
- Polished and high-gloss chrome-plated, good optical quality
- Tilttable mirror on handle
- Screwable telescopic handle extendable from 30 to 54 cm

Wöhler Chimney Mirror Small

Wöhler chimney mirror, metal mirror plate 7 x 10 cm with leather sleeve

Article no. 1015

Wöhler Metal Chimney Mirror Small
with telescopic handle

High-gloss chrome-plated metal mirror, 6.8 x 10 cm, telescopic handle 54 cm long, with imitation leather cover

Article no. 1748

Wöhler online shop

Discover all the details about the product and much more. Plus, ordering is easy!

wohler.co.uk/P_11



Wöhler DP 600 Leakage Tester

for tightness testing of chimneys and flue gas systems and for 4 Pa-test



Features

- Equipped with a brilliant colour display and a simple menu navigation
- Volume flow adjustable up to 200 m³/h
- Extended pressure range up to ±7,000 Pa
- Integrated memory for up to 100 measurement records
- USB interface for the PC
- IrDA interface for the printer
- Tightness classes preset for flue gas systems N, P and H according to EN 1443
- 4 / 8 Pa-Test without any auxiliary measuring instrument

Technical Data

Pressure	Measuring range	±7,000 Pa
	Resolution	0.1 Pa from 0...900 Pa 1 Pa starting from 900 Pa
	Accuracy	±0.5 Pa ±2.5 % from measured value
Air volume flow without adapter	Measuring range	0...200 Nm/h
	Resolution	0.1 Nm/h
	Accuracy	±2.5 Nm/h ±5 % from measured value
Air volume flow with adapter 3.0	Measuring range	0...10 Nm/h
	Resolution	0.01 Nm/h
	Accuracy	±0.05 Nm/h ±5 % from measured value
Air volume flow with adapter 0.3	Measuring range	0...18 NL/min
	Resolution	0.01 NL/min
	Accuracy	±0.05 NL/min ±5% from measured value

Wöhler DP 600
UK Version

Scope of delivery: Wöhler DP 600 with UK power cable and adapter for all leak measurements on flue gas systems in a plastic case.

Without sealing bubbles and sealing elements

Article no. 26651

Sets		Article no.
	Sealing Set Compact for P/M/H Test for 200/ 1,500/ 5,000 Pa measurements Sealing bladder compact Ø 40 - 150 mm with gas lead-through, Sealing bladder Compact Ø 40 - 150 mm without gas lead-through, with connection for telescopic set sealing bladder, Telescopic set sealing bladder compact Ø 40 - 150 mm, consisting of extension hoses set 1 x 2.5 m / 1 x 5 m / 1 x 10 m and connectors for GRP rods with thread M5, Threaded adapter M5 to M10 for GRP rods with M10 thread, aluminium pressure pump	6578
	Sealing Bladder Compact Ø 40 - 150 mm without gas lead-through, Sealing bladder Compact Ø 40 - 150 mm without gas lead-through, with connection for telescopic set sealing bladder, Telescopic set sealing bladder compact Ø 40 - 150 mm consisting of extension hoses set incl. extension hoses 1 x 2.5 m / 1 x 5 m / 1 x 10 m and connectors for GRP rods with thread M5, Threaded adapter M5 to M10 for GRP rods with M10 thread, aluminium pressure pump	6795
	Telescope Set Sealing Bladder Compact Ø 40 - 150 mm for Wöhler DP 600 Extension hose set incl. extension hoses 1 x 2.5 m / 1 x 5 m / 1 x 10 m, Connector for GRP rods with thread M5, Threaded adapter M5 to M10 for GRP rods with M10 thread	6567
	Sealing Set Type N for Wöhler DP 600, for 20+40 Pa-measurements Scope of delivery: 5 conical sealing elements for measurement tasks made of closed-cell, stable foam, Ø 11 - 20 cm with hole, Ø 14 - 18 cm without hole, 11x23 - 19x31 cm with hole, 12x12 - 19x19 cm without hole, 12x24 - 20x32 cm without hole, Extension tube, Extension hoses, Pressure connection hose 4 m, Probe tube, Extension tube, PVCU angle	11140
	4/8 Pa-Test-Set DP 600 (detailed procedure) Extension hose, hose capillary set with minus (-) connection and plus (+) connection, round sealing elements with 11-20 cm hole, XXL transport case	11149
	Leakage Test Kit Wöhler DP 600 for stoves sealing elements, extension tube 3.75 m, flexible capillary 6 m minus (-) and connectors, flexible capillary 6m plus (+) and connectors, aluminium case XXL	2677
Accessories		Article no.
	Push rod Wöhler sealing bladder compact D40 – D150	11186
	Wöhler Viper S 15 m GRP Rod 4.5 mm, 15 m stainless steel end piece M5, guidance adapter (without stars)	2028
	Capillary Hose with (+) Connector Wöhler DP 600 / 700 for 4 Pa-Test capillary hose 6 m, connector, silicone hose	2604
	Capillary Hose with (-) Connector Wöhler DP 600 / 700 for 4 Pa test capillary hose 6 m and silicone hose	2672
	Sealing Bladder Compact Ø 40 - 150 mm with gas lead through for Wöhler DP 600 with connecting hoses for air and pressure	6566
	Sealing Bladder Compact Ø 40 - 150 mm without gas lead through for Wöhler DP 600 with connection for telescope set sealing bladder and hose with shut-off valve	6560
	Gas coupling Ø 15 x 31 mm POM black for Wöhler DP 600 / DP 700; D 6.5 for the retrofitting of Wöhler DP 23 / 94 hose systems	4732
	Sealing Bladder with gas lead through for Wöhler DP 600 / DP 23 Ø 150 - 350 mm	7974
	Ø 350 - 600 mm	7966
	Sealing Bladder without gas lead through for Wöhler DP 600 / DP 23 Ø 150 - 350 mm	7971
	Ø 350 - 600 mm	7981
	Wöhler Telescopic Bladder Ø 150 - 350 mm for Wöhler DP 600 / DP 23 without gas feed-through with 20 m hose for pushing upwards mounting for GRP rod or viper	7938

Wöhler online shop

Discover all the details about the product and much more. Plus, ordering is easy!

wohler.co.uk/P_122

Accessories		Article no.
	Aluminium Case XXL 48 x 27 x 48 cm	5824
	Universal Box for Wöhler DP 600 / DP 700 offers sufficient space for the Wöhler DP 600 / DP 700 leakage tester as well as printer, sealing set type N and all sealing elements (remove original insert)	50784
	Wöhler Replacement Bladder Body for compact bladders Ø 40 - 150	6794
	Replacement Bladder Ø 50 - 150 mm for sealing bladders with or without gas lead through	8034
	Wöhler Replacement Bladder Suitable for sealing bladders with and without gas feed through Ø 150 - 350 mm	6217
	Ø 350 - 600 mm	6215
	Aluminium Pump Master-Blaster for test sets, gas pipes and sealing bubbles	53817
	Valve Set for compressor "Airman" and aluminium pump Master-Blaster	55447
	Extension Tube 3.75 m for Wöhler DP 600 Ø 50 mm	50676
	Measuring Hose Ø 5.5 mm / 1 m	2338
	Filter pad Wöhler 5 pcs. for Wöhler DP 600 / DP 700	2617
	Smoke Cartridges pack of 5. for checking the tightness of flue gas systems each cartridge produces 3 - 4 minutes of light grey smoke	1795
	Sealing Element Round for measuring tasks for Wöhler DP 600 / 23 with hole Ø 4 cm Height 14 cm	
	Ø 11 - 21 cm	10296
	Ø 11 - 21 cm	10295
	Ø 23 - 33 cm	10294
	Sealing Element, square with hole for Wöhler DP 600 Height 14 cm	10288
	8 x 16 cm / 18 x 26 cm	10290
	10 x 20 cm / 20 x 30 cm	10293
	12 x 12 cm / 22 x 22 cm	10289
	12 x 24 cm / 22 x 34 cm	10291
	19 x 19 cm / 29 x 29 cm	10288
	25 x 30 cm / 35 x 40 cm	10292



MEASURING

Knowledge platform



Leakage testing of exhaust gas systems

To ensure that the heating system still functions properly, the flue gases must be transported outside with the help of fans or blowers. This creates an overpressure within the flue gas system. Any leaks in the flue gas pipes would therefore lead to toxic flue gases escaping into the room air. It is therefore advisable to carry out a leak test on the flue gas system.

Scan now!





wohler.co.uk/measuring

Wöhler DM 602 Digital Manometer

Burner adjustment of gas burners



Features

- Adjustment of the gas pressure on gas fireplaces
- Measurement of the fan differential pressure
- Measurement of chimney draught
- Temperature measurement
- Integrated magnets, shock-protected housing
- Robust sensor up to 3 bar as well as high resolution measuring range (1 Pa)
- Extremely responsive display of the measured value
- Illuminated display for quick reading of the measured value
- Stable measured values in any position due to high-quality pressure sensor
- Printout of test results directly on site with the Wöhler TD 100
- Selectable measuring units

Technical Data

Differential pressure	Measuring range	±3,000 mbar
	Resolution	0.01 hPa in range -210...210 mbar otherwise 0.1 mbar
	Accuracy	< 3 % from measured value in range < ±2 mbar better than ±0.06 mbar
Internal temperature measurement	Measuring range	-20...60 °C
	Resolution	0.1 °C
	Accuracy	< ±1 °C
External temperature measurement (with connected temperature sensor)	Measuring range	-20...800 °C
	Resolution	0.1 °C
	Accuracy	< ±1 °C in range -20...67 °C otherwise 1.5 % from measured value according to EN 50379-1

Wöhler DM 602 Digital Manometer
Display indication in mbar and °C

Scope of delivery: Wöhler DM 602 Digital Manometer, Batteries, Hand strap, Measuring hose 1.5 m

Article no. 8837

Wöhler CM 220 Carbon Monoxide Meter

Assessment of air quality

Applications

- Measurement of CO concentration in the ambient air
- Test CO leakage from furnaces, water heaters, stoves
- MWC-Value-Measurement (Maximum Workplace Concentration)

Features

- Quick response for testing safe entry conditions
- Easy operation-one button, manual zero
- Visual and acoustic indicators
- Backlight
- Precise electrochemical sensor
- Calculation of the MWC-value (Maximum Workplace Concentration)

Technical Data

Range	0...999 ppm
Accuracy	±20 % at 0...99 ppm ±15 % at 100...500 ppm
Resolution	1 ppm
Response time	up to 60 sec.
Humidity range	5...99 % r.h. (non condensing)



Wöhler online shop

Discover all the details about the product and much more. Plus, ordering is easy!

wohler.co.uk/P_183



Wöhler online shop

Discover all the details about the product and much more. Plus, ordering is easy!

wohler.co.uk/P_50



Wöhler RP 72 Soot Test Pump

For measuring the soot level manually



Features

- Rugged and reliable 10 stroke Soot Test Pump
- Long hose: ideal for difficult to reach measurement openings
- Non centered soot spot, allows many tests on one filter, easy to compare
- 2 filter technology

Technical Data

Exhaust gas volume	1.63 l at 10 strokes
Suction hose	1 m

Wöhler RP 72 Soot Test Pump

Standard Set for manual soot count measurement

Scope of delivery: Wöhler RP 72 Soot Test Pump with 220 mm long sampling probe and plastic measuring head, Smoke spot comparison scale, filter paper (300 pieces), cotton rolls short (25 pieces), cotton rolls long (50 pieces)

Article no. 9150

Wöhler RP 72 Soot Test Pump

Professional Set for manual soot count determination

Scope of delivery: Wöhler RP 72 soot test pump with 220 mm long sampling probe and plastic measuring head and operating instructions, Smoke spot comparison scale, Filter paper (300 pieces), Cotton rolls short (25 pieces), Cotton rolls long (50 pieces), Threaded cone, Oil test bottle, Maintenance oil, Probe brush

Article no. 9152

Accessories

		Article no.
	Wöhler RP 72 Soot Spot Comparison Scale from soot number 1 to 10	2416
	Brush 6 mm	2419
	Turbulence Spiral for Wöhler RP 72 Even distribution of the soot stain	20401
	Probe Holder with Probe 220 mm for Wöhler RP 72	7547
	Aluminium Measuring Head with clamps	2728
	Probe Connector including water catcher tube	3879
	VA-Probe 750 mm with Turbulence Spiral	2722
	Wöhler RP 72 Filter Paper Dispenser TÜV-tested filter paper: contains 300 sheets of filter paper	3700
	Oil Test Bottle with Acetone Filling 50 ml, UN1090	2481
	Service Bag	1077
	Wadding Filters Short for Wöhler RP 72, A 500 / 25 piece for use in the condensate trap also for E 98 / A 97 / RP 72 - REPLACES Art / part no. 1006	5289
	Soot test filters, for Wöhler RP 72, RG 68 and RZ 95 300 pieces	2415
	Wadding Filters Long 50 pieces	2450
	Wadding Filters Long 150 pieces	621
	Soot test filters, large pack for Wöhler RP 72, RG 68 and RZ 95 1,800 pieces, Ø 34 mm	590
	Special Servicing Oil	2418
	Threaded cone for probes Ø 8 mm stainless steel, to stabilize the gas probe in the flue pipe	1235



INTERNATIONAL OPERATING, INDEPENDENT, GERMAN FAMILY-OWNED COMPANY

For over 90 years, we have been a technically orientated, internationally operating family business with more than 250 employees worldwide. We are a leading manufacturer of measurement technology, inspection technology and cleaning technology with headquarters in Bad Wünnenberg, Germany.

Scan the QR code and find out more about our corporate culture, how we are committed to sustainability and how we act as an employer.



WÖHLER

WOHLER UK LIMITED

G1 Lincoln House · Lincoln Way · Sherburn in Elmet · LS25 6PJ

Phone: 01977 80 60 40 · **E-Mail:** info@wohler.co.uk